


LED Neon Strip

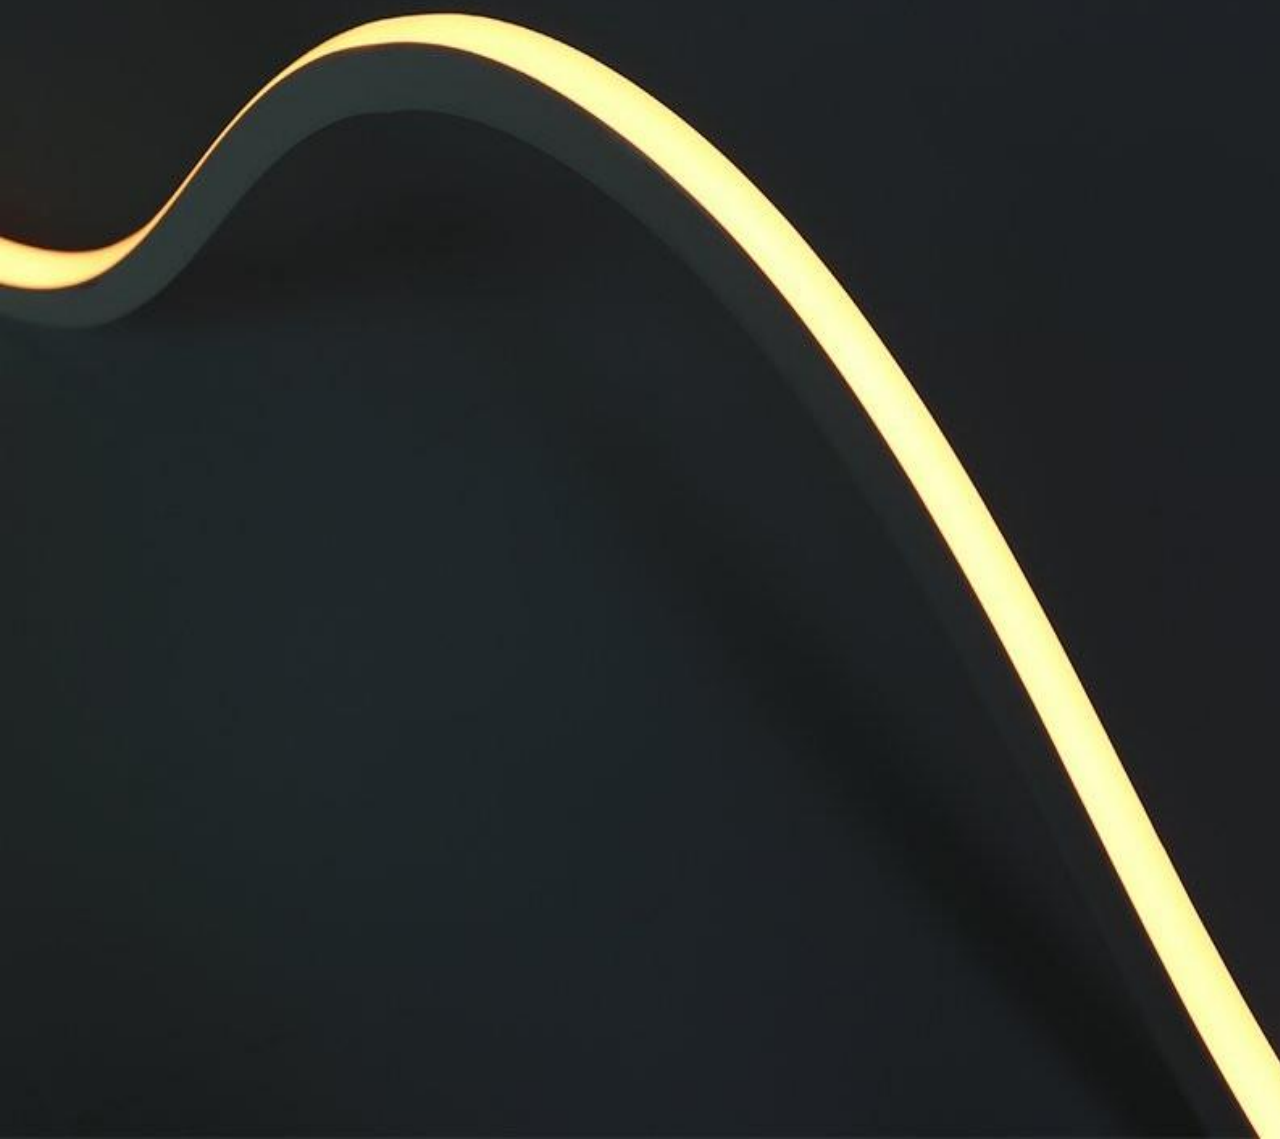

LUXX Light Technology

ABOUT US

LUXX Lichttechnik GmbH / LUXX Light Technology Ltd. Represents a German headquartered inter-national group with lighting competence and innovations since over 20 years.

Our core competences:

- Research & Development
- Design
- Manufacturing
- Quality Assurance
- Cost Control

LUXX is dedicated to slim and energy efficient linear lighting fixtures since 1997.

1997 — CCFL (cold cathode fluorescent lamp) slim and energy efficient linear lighting fixtures

2006 — LED ultra slim and energy efficient linear lighting fixtures

2012 — All LED Commercial Lighting fixtures and replacements

2013 — LED Industrial Lighting fixtures

Since 2014 LUXX presents the latest edition:

- LED refrigeration equipment lighting, freezers, coolers, chillers, cabinets
- LED fresh food lighting—cabinets, shelves and displays
- LED vending machine lighting
- LED shelf- and rack lighting

LUXX Light Technology (Shenzhen) Ltd.

5th Floor, Building 8, Hui Debao Industrial Park, Bai Huayuan Rd, Guang Ming District Shenzhen 518107, China




Phone: +86 755 27049942

Fax: +86 755 29677724

info@luxx.cn

www.luxx.cn

TOPneon 0606

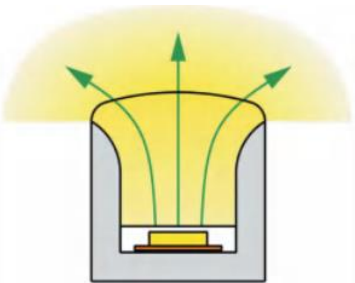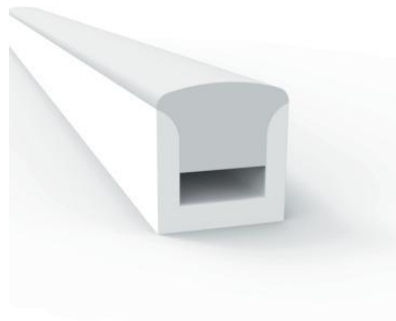

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC

LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	4mm




Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----



End caps

TOPneon 0807

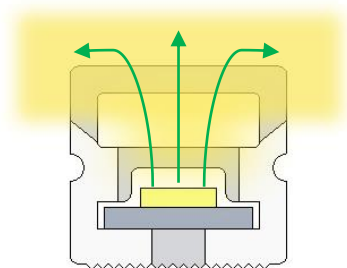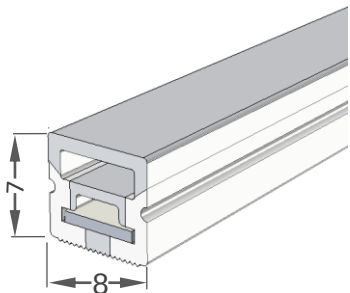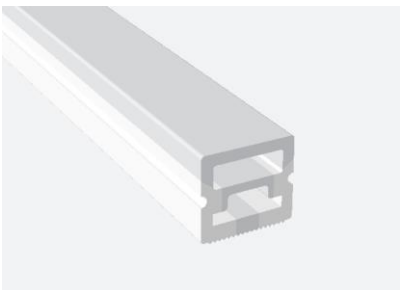

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC

LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----






End caps



Mounting Clip

Mounting Profiles

TOPneon 1010

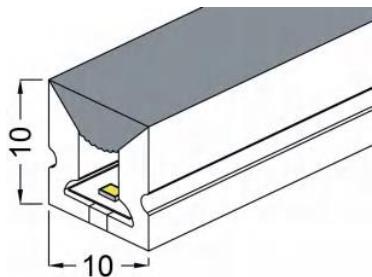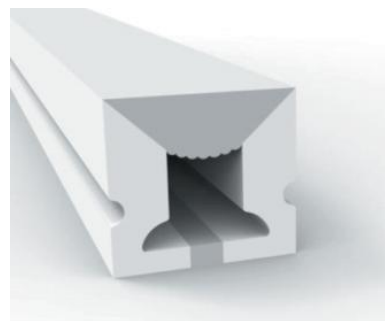

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC

LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----





End caps



Mounting Clip Mounting Profiles

TOPneon 1010T



Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC

LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm

Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----





End caps



Mounting Clip Mounting Profiles

TOPneon 1212

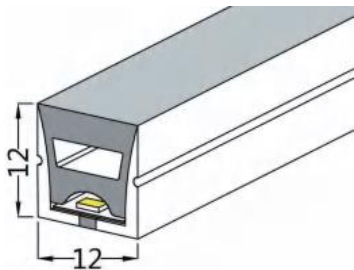

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC

LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
-----------	-----





End caps



Mounting Clip

Mounting Profiles

TOPneon 1212T

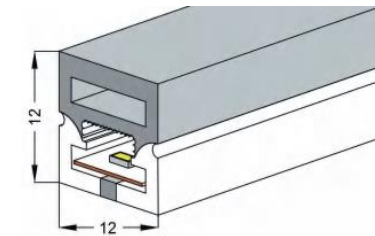

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC


LED	
Type	2835
Q'ty	140
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
-----------	-----




End caps

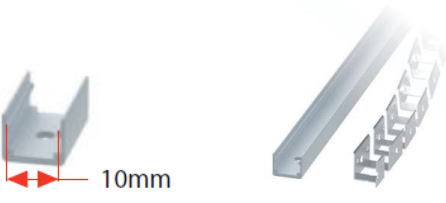

Mounting Clip

Mounting Profiles

TOPneon 2014

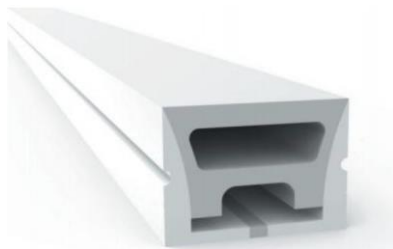

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output

Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating


P67



End caps




Mounting Clip



Mounting Profiles

TOPneon 2014T

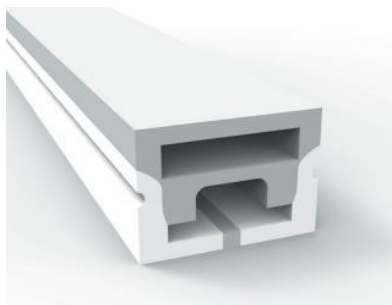

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output

Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating


P67

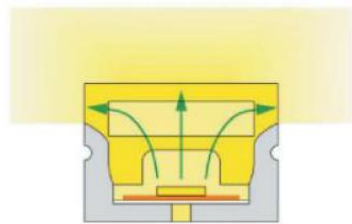

End caps





Mounting Clip



Mounting Profiles

TOPneon 1616

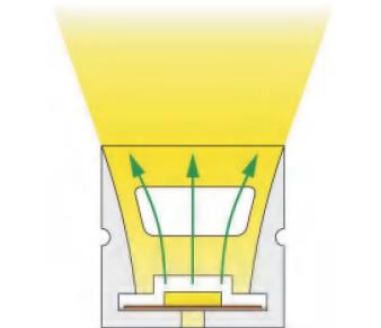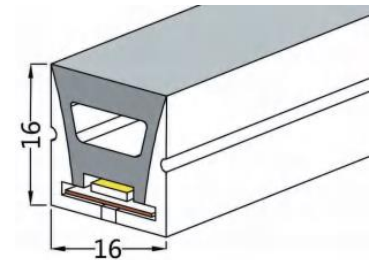

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10/12mm

Light Output


Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps






Mounting Clip



Mounting Profiles

SIDeneon 1616

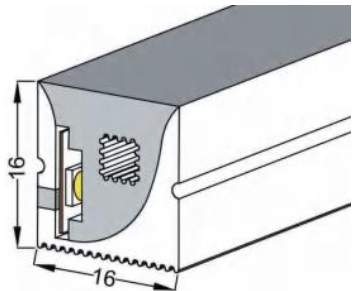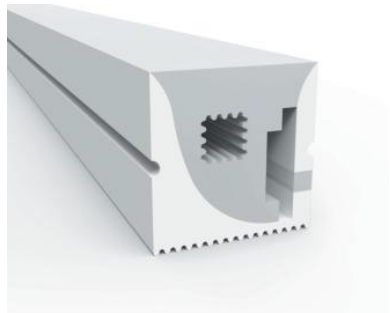

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output


Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating


P67



End caps





Mounting Clip



Mounting Profiles

TOPneon 2020

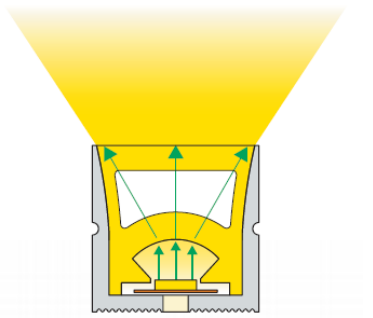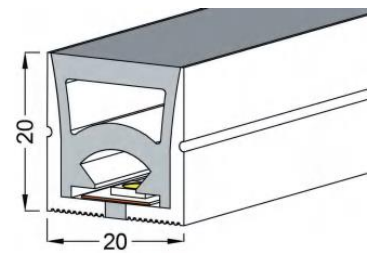


Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC



LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10/12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

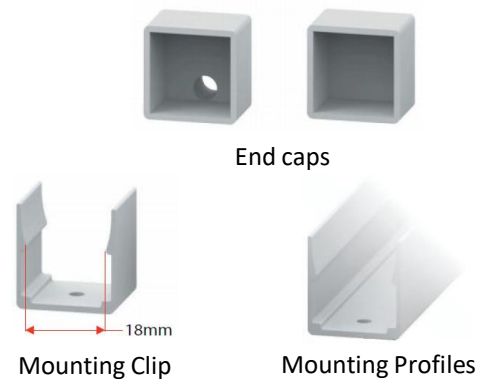

SIDeneon 2020

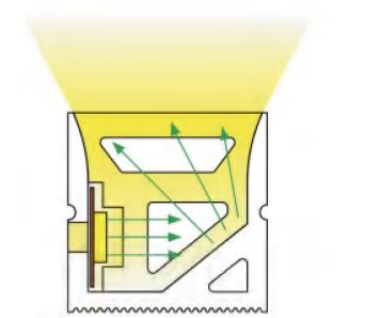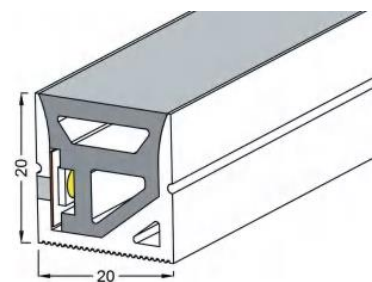


Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC

LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

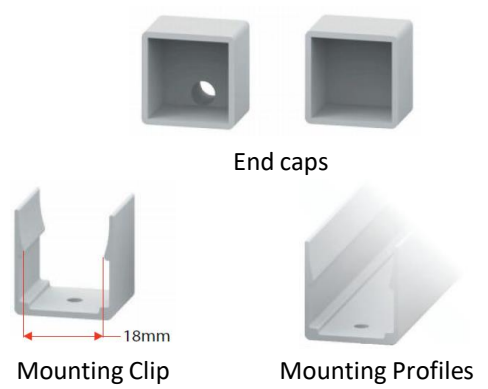

TOPneon 3020



Specifications / data per meter

Electrical

Power	18W
Input voltage	12V / 24V DC

LED


Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	15mm (2 rows LED)

Light Output


Beam Angle	120°
Efficiency	50 Lm/W
Lumen	900 Lm

IP Rating

P67

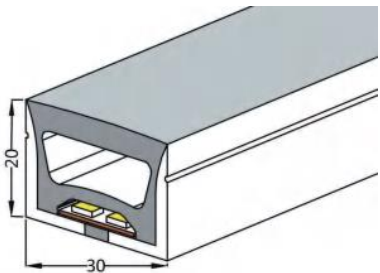


End caps



Mounting Clip



Mounting Profile



TOPneon 4025



Specifications / data per meter

Electrical

Power	20W
Input voltage	12V / 24V DC

LED


Type	2835
Q'ty	280
CCT	2700~6500K
CRI	>80 Ra
PCB Width	20mm (2 rows LED)

Light Output

Beam Angle	120°
Efficiency	50 Lm/W
Lumen	1000 Lm

IP Rating

P67

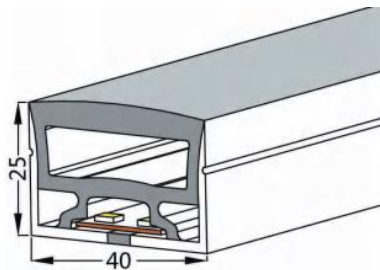


End caps





Mounting Clip



Mounting Profile



SIDeNeon 0408

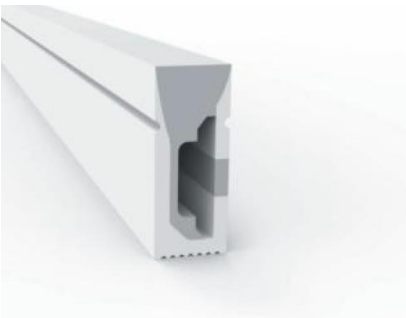

Specifications / data per meter

Electrical

Power	8W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5mm

Light Output


Beam Angle	120°
Efficiency	50 Lm/W
Lumen	400 Lm

IP Rating

P67



End caps





Mounting Clip



Mounting Profile

SIDeNeon 0410

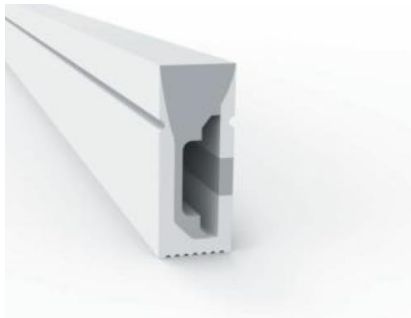

Specifications / data per meter

Electrical

Power	8W
Input voltage	12V / 24V DC

LED


Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5/6mm

Light Output


Beam Angle	120°
Efficiency	50 Lm/W
Lumen	400 Lm

IP Rating

P67



End caps




Mounting Clip



Mounting Profile

SIDeneon 0612



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output


Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps




Mounting Clip



Mounting Profile

SIDeneon 0613T



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output


Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps




Mounting Clip



Mounting Profile

SIDeneon 1220

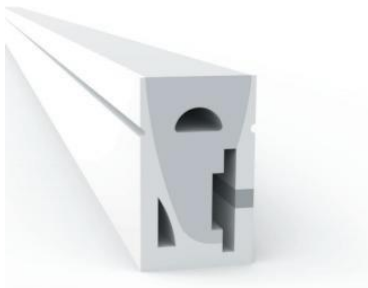

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm

Light Output


Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps



Mounting Clip



Mounting Profile

SIDeneon 1220T



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm

Light Output


Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps






Mounting Clip



Mounting Profile

SIDeneon 1018T

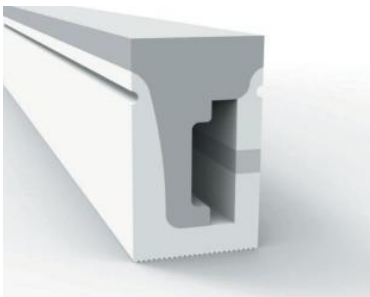

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm

Light Output


Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps





Mounting Clip



Mounting Profile

SIDeneon 3032



Specifications / data per meter

Electrical

Power	18W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	15mm (2 rows LED)

Light Output

Beam Angle	120°
Efficiency	50 Lm/W
Lumen	900 Lm

IP Rating

P67



End caps






Mounting Clip



Mounting Profile

SIDeNeon 0815T

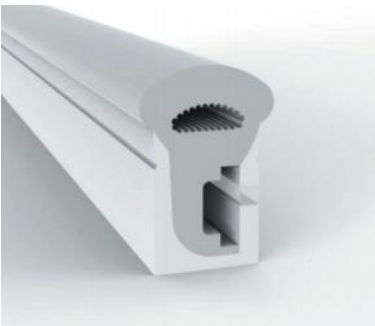

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5mm

Light Output

Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps






Mounting Clip



Mounting Profile

SIDeNeon 0817T



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output

Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps



Mounting Clip



Mounting Profile

SIDeneon 1023T



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC



LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm


Light Output

Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----



End caps



Mounting Clip



Mounting Profile

SIDeneon 1225T



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC



LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output

Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----



End caps



Mounting Clip



Mounting Profile

BASeneon 1313



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED


Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output

Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67




End caps



Mounting Clip

BASeneon 1513

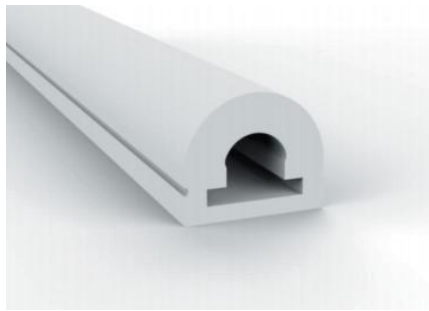

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED


Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm

Light Output

Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67

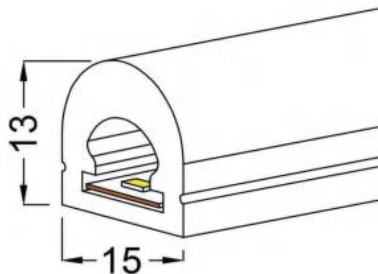

End caps



Mounting Clip

CIRCLeneon 13



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED


Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5mm

Light Output

Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End caps



Mounting Clip

CIRCLeneon 20



Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm

Light Output

Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67

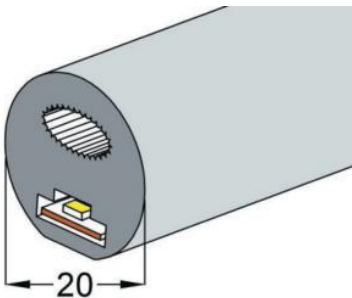


End caps



Mounting Clip

CIRCLeneon 22



Specifications / data per meter

Electrical

Power	18W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm (double sides)

Light Output

Beam Angle	360°
Efficiency	50 Lm/W
Lumen	900 Lm

IP Rating

P67




End caps



Mounting Clip

CIRCLeneon 22S

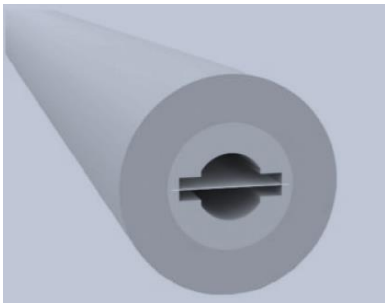

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED



Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm (double sides)

Light Output

Beam Angle	360°
Efficiency	50 Lm/W
Lumen	900 Lm

IP Rating

P67



End caps



Mounting Clip