


# COB LED Linear Fixture



**LUXX** Light Technology

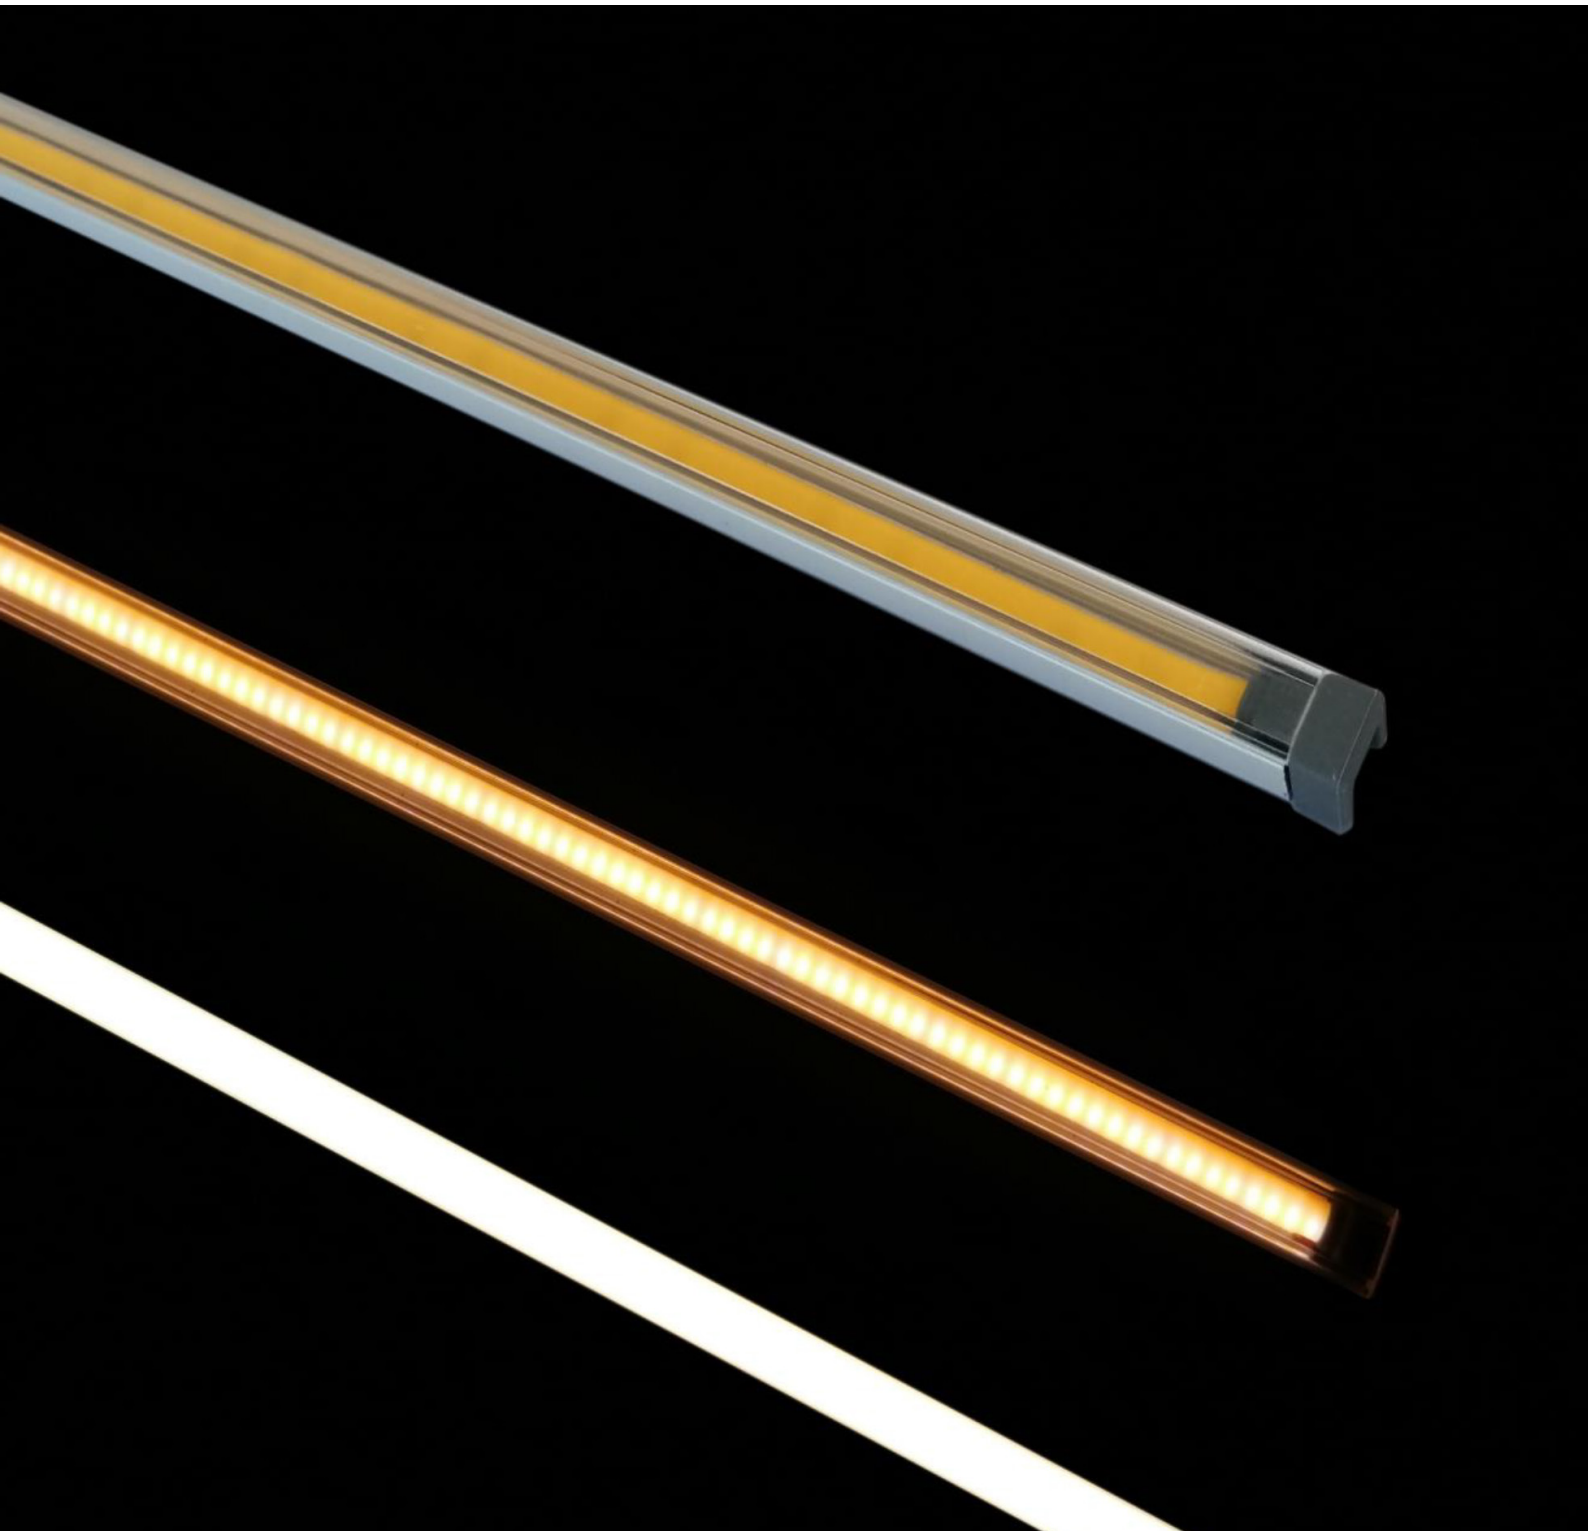

CANNES

PMMA LED cooler lighting fixture


The quadrant lighting fixture can be adapted to any corner elegantly.  
Different configurations available upon request.

Specifications/data per meter

<b>Electrical</b>	
Power	9W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	120°
Efficiency	100 Lm/W
Lumen	900 Lm (clear) 800 Lm (frosted)
<b>IP Rating</b>	
IP54	

<b>Working Temperature</b>	
-25°C / -35°C to + 45°C	
<b>Appearance</b>	
Material	PMMA
Dimension	L1000 x W10 x H10mm
Max. Length Available	3100mm
Diffuser	Clear / Frosted

**Accessories**  
Spring steel clip (with screw/magnet), Magnetic tape

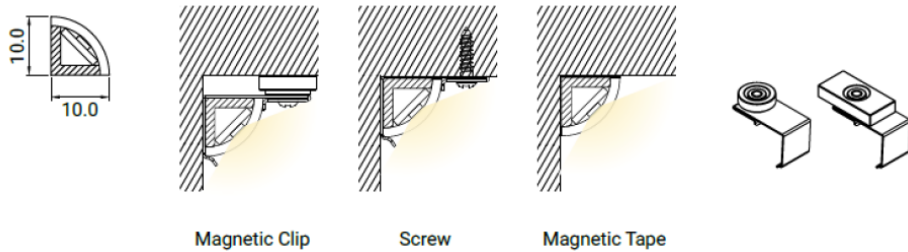

COB LED Freezer Light



DUO CANNES

PMMA LED cooler lighting fixture

Duo Cannes can light up two sides of most refrigerators, chillers and cabinets.  
Different configurations available upon request.

Specifications/data per meter

<b>Electrical</b>	
Power	18W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	210°
Efficiency	100 Lm/W
Lumen	1800 Lm
<b>IP Rating</b>	
IP54	

<b>Working Temperature</b>	
-25°C / -35°C to + 45°C	
<b>Appearance</b>	
Material	PMMA
Dimension	L1000 x W18.4 x H10mm
Max. Length Available	3100mm
Diffuser	Clear

**Accessories**  
Spring steel clip (with screw/magnet), Magnetic tape





## NIZZA

### PMMA LED cooler lighting fixture

The co-extruded PMMA lighting fixture is designed for shelf and refrigeration display lighting.  
Different configurations available upon request.

#### Specifications/data per meter

##### Electrical

Power 9W  
Input voltage 12V / 24V DC

##### LED

Type COB  
Q'ty 480 chips  
CCT 2700~6500K  
CRI >80 Ra

##### Light Output

Beam Angle 120°  
Efficiency 80 Lm/W  
Lumen 700 Lm

##### IP Rating

IP54

##### Working Temperature


-25°C / -35°C to + 45°C

##### Appearance

Material PMMA  
Dimension L1000 x W11 x H12mm  
Max. Length Available 3100mm  
Diffuser Milky

##### Accessories

Spring steel clip (with screw/magnet), Magnetic tape

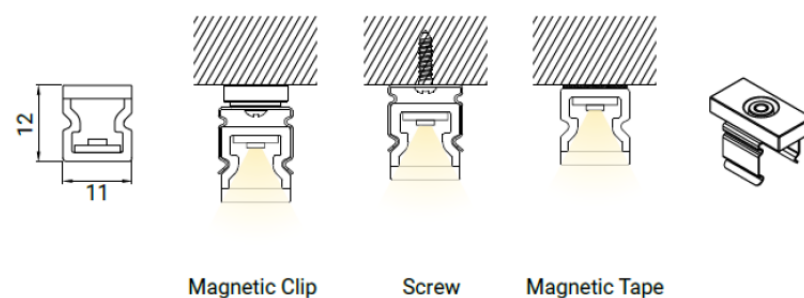

Magnetic Clip

Screw

Magnetic Tape



## COB LED Freezer Light



## MONZA

### PMMA LED cooler lighting fixture

A special optical diffuser makes the LED dots invisible, creating a linear effect similar to that of fluorescent tubes.  
Food display versions are available.  
Different configurations available upon request.

#### Specifications/data per meter

##### Electrical

Power 9W  
Input voltage 12V / 24V DC

##### LED

Type COB  
Q'ty 480 chips  
CCT 2700~6500K  
CRI >80 Ra

##### Light Output

Beam Angle 210°  
Efficiency 60 Lm/W  
Lumen 550 Lm

##### IP Rating

IP54

##### Working Temperature


-25°C / -35°C to + 45°C

##### Appearance

Material PMMA  
Dimension L1000 x W11 x H14mm  
Max. Length Available 3100mm  
Diffuser Milky White

##### Accessories

Spring steel clip (with screw/magnet), Magnetic tape

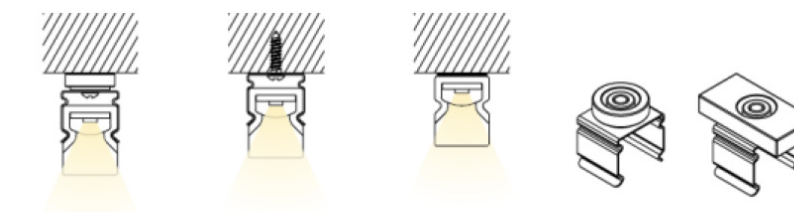

Magnetic Clip

Screw

Magnetic Tape





SEINA


PMMA LED cooler lighting fixture

Siena is designed for shelf and refrigeration display lighting. Mounting is easy using metal clips or magnets. Different configurations available upon request.

Specifications/data per meter

<b>Electrical</b>	
Power	9W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	120°
Efficiency	100 Lm/W
Lumen	900 Lm
<b>IP Rating</b>	
IP54	

<b>Working Temperature</b>	
-25°C / -35°C to + 45°C	
<b>Appearance</b>	
Material	PMMA
Dimension	L1000 x W17 x H8.7mm
Max. Length Available	3100mm
Diffuser	Clear
<b>Accessories</b>	
Spring steel clip (with screw/magnet), Magnetic tape	

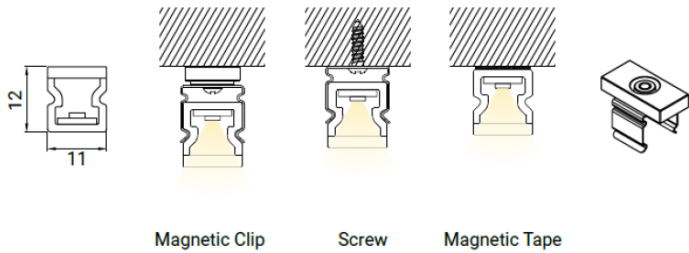

COB LED Freezer Light



MANTUA


PMMA LED cooler lighting fixture

Mantua is designed for refrigeration lighting applications as an alternative to T5 tube light installations. Different configurations available upon request.

Specifications/data per meter

<b>Electrical</b>	
Power	9W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	120°
Efficiency	100 Lm/W
Lumen	900 Lm
<b>IP Rating</b>	
IP54	

<b>Working Temperature</b>	
-25°C / -35°C to + 45°C	
<b>Appearance</b>	
Material	PMMA
Dimension	L1000 x Φ16mm
Max. Length Available	3100mm
Diffuser	Clear
<b>Accessories</b>	
Spring steel clips (with screw / magnet) PC clip (with screw / magnet)	

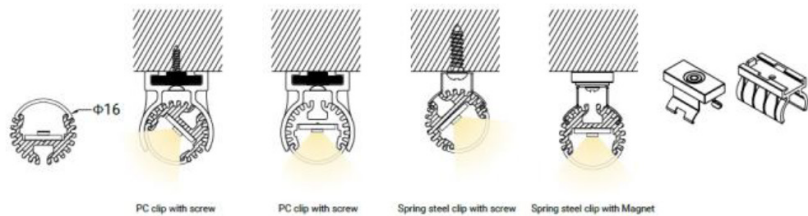



MONACO


PMMA LED cooler lighting fixture

Our smallest lighting fixture ever, just 5mm x 7mm!  
Hundreds of thousands sold to the European display industry. Monaco is designed for display, cabinet and undercabinet applications.  
Different configurations available upon request.

Specifications/data per meter

<b>Electrical</b>	
Power	7W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	456 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	120°
Efficiency	100 Lm/W
Lumen	700 Lm (Clear) 600Lm (Frosted)

<b>Appearance</b>	
Material	PMMA
Dimension	L1000 x W7 x H5mm
Max. Length Available	2500mm
Diffuser	Clear/Frosted
<b>Mounting</b>	
Surface	
<b>Accessories</b>	
Spring steel clip (with screw/magnet), Adhesive tape	

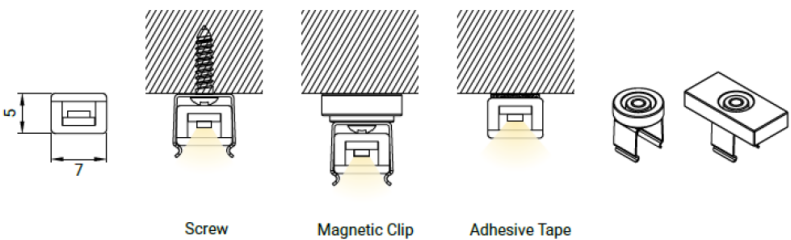

COB LED Shelf Light



ALU MONACO Slim


PMMA LED cooler lighting fixture

An ultra slim lighting fixture, just 6mm x 8mm.  
Alu Monaco Slim is designed for ceiling, wall, cabinet and undercabinet applications.  
One of the smallest LED lighting fixtures in the world.  
Different configurations available upon request.

Specifications/data per meter

<b>Electrical</b>	
Power	7W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	456 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	120°
Efficiency	100 Lm/W
Lumen	700 Lm (Clear) 500 Lm (Milky)

<b>Appearance</b>	
Material	Anodized aluminium , PMMA
Dimension	L1000 x W8 x H6mm
Max. Length Available	2500mm
Diffuser	Clear / Frosted / Milky
<b>Mounting</b>	
Surface / Recessed	
<b>Accessories</b>	
Spring steel clip (with screw/magnet), Adhesive tape	

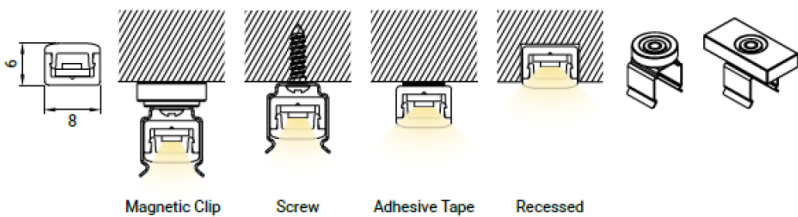





## ALU MONACO semi-linear

### PMMA LED shelf lighting fixture

Another ultra small lighting fixture, just 8mm x 10mm!

This one is designed for ceiling, wall, cabinet and undercabinet applications.

Semi-linear, means the LED dots are slightly visible, Alu Monaco does not provide a completely linear light.

Different configurations available upon request.

### Specifications/data per meter

#### Electrical

Power	7W
Input voltage	12V / 24V DC

#### LED

Type	COB
Q'ty	456 chips
CCT	2700~6500K
CRI	>80 Ra

#### Light Output

Beam Angle	120°
Efficiency	100 Lm/W
Lumen	700 Lm (Clear) 450 Lm (Milky)

#### Appearance


Material	Anodized aluminium, PMMA
Dimension	L1000 x W8 x H10mm
Max. Length Available	2500mm
Diffuser	Clear / Frosted / Milky

#### Mounting


Surface

#### Accessories

Spring steel clip (with screw/magnet), Adhesive tape

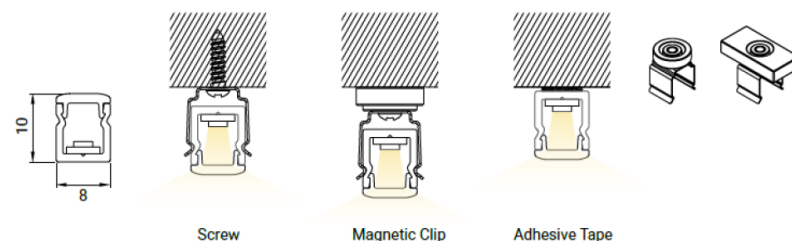

## COB LED Shelf Light

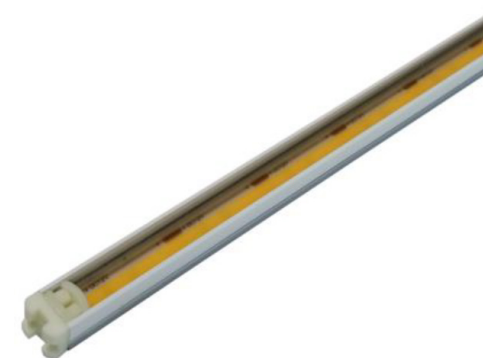

## ROMA

### PMMA LED cooler lighting fixture

The smallest linear fixture in the world, just in 10mm x 10mm. Our special lenticular diffuser creates a truly linear light without any visible LED dots.

A perfect choice, if you are looking for a small yet linear light source up to 2500mm.

### Specifications/data per meter

#### Electrical

Power	9W
Input voltage	24V DC

#### LED

Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra

#### Light Output

Beam Angle	120°
Efficiency	100 Lm/W
Lumen	900 Lm (Clear) 700 Lm (Milky)

#### Appearance


Material	Anodized aluminium, PMMA
Dimension	L1000 x W10 x H10mm
Max. Length Available	3100mm
Diffuser	Clear/Milky

#### Mounting

Surface / Recessed

#### Accessories

Spring steel clip (with screw/magnet), Adhesive tape

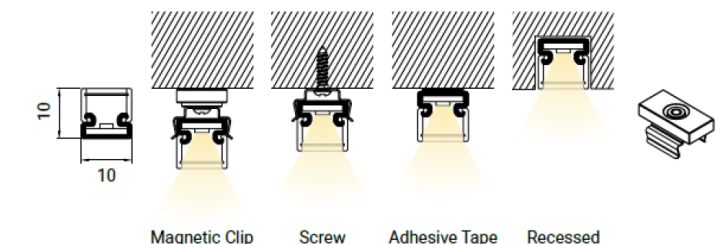



## SLIMLINE SM

Slimline SM is designed for shelf and refrigeration display lighting.

Mounting is easy using metal clips and magnets.

Our standard fixture for most lighting applications.

Food display versions are available.

Different configurations available upon request.

### Specifications/data per meter

#### Electrical

Power	9W
Input voltage	12V / 24V DC

#### LED

Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra

#### Light Output

Beam Angle	120°
Efficiency	100 Lm/W
Lumen	900 Lm (Clear) 700 Lm (Milky)

#### Food Display Version

Meat	CCT-Pink
Fish	CCT-10000K
Vegetable&Fruit	CRI>97 Ra

#### Appearance


Material	Anodized aluminium, PMMA
Dimension	L1000 x W17 x H8.7mm
Max. Length Available	2500mm
Diffuser	Clear / Frosted / Milky

#### Mounting

Surface

#### Accessories

Spring steel clip (with screw/magnet), Magnetic tape

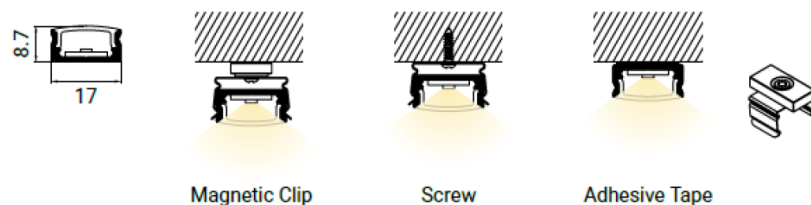

## COB LED Shelf Light

## SLIMLINE RM



TSlimline RM allows a recessed, flush mounting.

It is designed for display and cabinet lighting applications.

Food display versions are available.

Different configurations available upon request.

### Specifications/data per meter

#### Electrical

Power	9W
Input voltage	12V / 24V DC

#### LED

Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra

#### Light Output

Beam Angle	120°
Efficiency	90-100 Lm/W
Lumen	900 Lm (Clear) 700 Lm (Milky)

#### Food Display Version


Meat	CCT-Pink
Fish	CCT-10000K
Vegetable&Fruit	CRI>97 Ra


#### Appearance

Material	Anodized aluminium, PMMA
Dimension	L1000 x W23.2 x H8.7mm
Max. Length Available	2500mm
Diffuser	Clear / Frosted / Milky

#### Mounting

Recessed

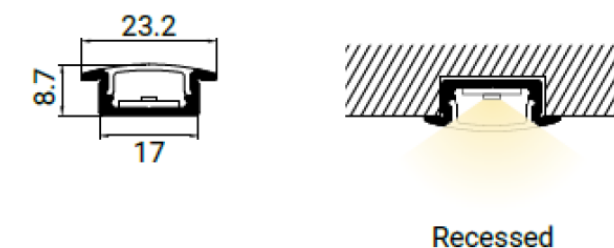

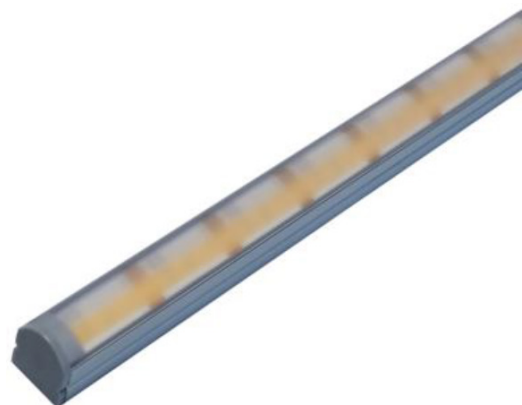

## LAS VEGAS

LAS VEGAS is a fixture which offers 5 different light beam angles ( 20°, (45°), (60°), (75°), (90°),

This focuses the light and creates various wall washer effects.

**RGB** linear version is available.

### Specifications/data per meter

#### Electrical

Power 9W  
Input voltage 12V / 24V DC

#### LED

Type COB  
Q'ty 480 chips  
CCT 2700~6500K  
CRI >80 Ra

#### Light Output

Beam Angle Adjustable  
20°, 45°, 60°, 75°, 90°  
Efficiency 90 Lm/W  
Lumen 800 Lm

#### Appearance


Material Anodized aluminium, PMMA  
Dimension L1000 x W15.5 x H18mm  
Max. Length Available 2500mm  
Diffuser Clear / Frosted / Milky

#### Mounting

Surface

#### Accessories

Spring steel clip (with screw/magnet), Adhesive tape

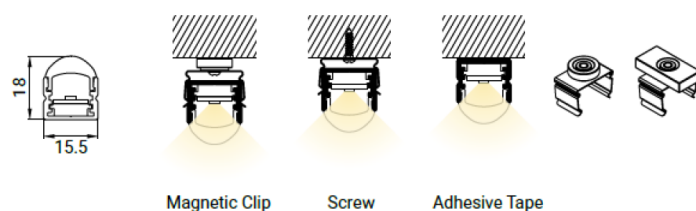

## COB LED Shelf Light



## MONZA LINEAR

### PMMA LED shelf lighting fixture

A special optical diffuser makes the LED dots invisible, creating a linear effect similar to that of fluorescent tubes.

Food display versions are available.

Different configurations available upon request.

### Specifications/data per meter

#### Electrical

Power 9W  
Input voltage 12V / 24V DC

#### LED

Type COB  
Q'ty 480 chips  
CCT 2700~6500K  
CRI >80 Ra

#### Light Output


Beam Angle 120°  
Efficiency 60 Lm/W  
Lumen 500 Lm

#### Appearance

Material PMMA  
Dimension L1000 x W11 x H14mm  
Max. Length Available 3100mm  
Diffuser Milky white

#### Accessories

Spring steel clip (with screw/magnet), Adhesive tape

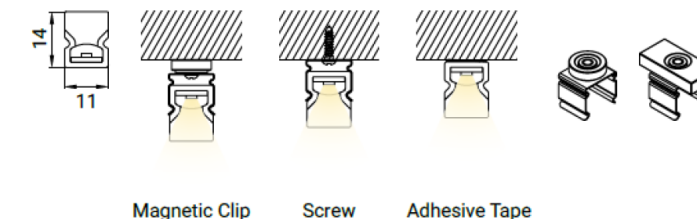





NIZZA LINEAR


PMMA LED shelf lighting fixture

The co-extruded PMMA lighting fixture is designed for shelf and refrigeration display lighting.  
Food display versions are available.  
Different configurations available upon request.

Specifications/data per meter

<b>Electrical</b>	
Power	9W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	120°
Efficiency	80 Lm/W
Lumen	700 Lm

<b>Appearance</b>	
Material	PMMA
Dimension	L1000 x W11 x H12mm
Max. Length Available	3100mm
Diffuser	Milky
<b>Mounting</b>	
Surface	
<b>Accessories</b>	
Spring steel clip (with screw/magnet), Adhesive tape	

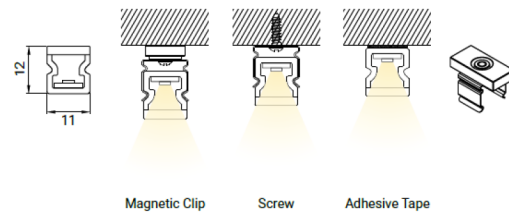

COB LED Shelf Light



MEMPHIS


Memphis is designed as a solid shelf lighting fixture.  
Several mounting options apply.  
Fresh food display versions and different configurations are available upon request.

RGB linear version is available.

Specifications/data per meter

<b>Electrical</b>	
Power	9W
Input voltage	12V / 24V DC
<b>LED</b>	
Type	COB
Q'ty	480 chips
CCT	2700~6500K
CRI	>80 Ra
<b>Light Output</b>	
Beam Angle	120°
Efficiency	100 Lm/W
Lumen	900 Lm (Clear) 700 Lm (Milky)

<b>Appearance</b>	
Material	Anodized aluminium, PMMA
Dimension	L1000 x W17 x H17.8mm
Max. Length Available	2500mm
Diffuser	Clear / Frosted / Milky
<b>Accessories</b>	
Spring steel clip / Magnet	

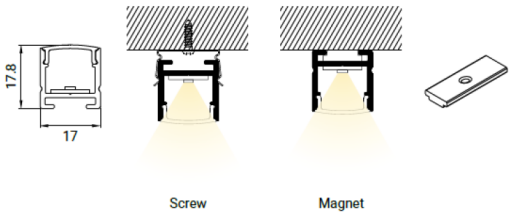



## MIAMI

Miami is designed as a indirecting shelf lighting fixture. An ideal fixture for shelf lighting from the front. Fresh food display versions and different configurations are available upon request.

### Specifications/data per meter

#### Electrical

Power 9W  
Input voltage 12V / 24V DC

#### LED

Type COB  
Q'ty 480 chips  
CCT 2700~6500K  
CRI >80 Ra

#### Light Output



Beam Angle 90°  
Efficiency 90 Lm/W  
Lumen 800 Lm

#### Appearance

Material Anodized aluminium, PC  
Dimension L1000 x W22 x H12.5mm  
Max. Length Available 2500mm  
Diffuser Milky

#### Mounting

Recessed



Recessed

## COB LED Shelf Light



## NEPLES

Naples is a standard indirect lighting fixture. An ideal fixture for under cabinet lighting from the front. Fresh food display versions and different configurations are available upon request.

### Specifications/data per meter

#### Electrical

Power 9W  
Input voltage 12V / 24V DC

#### LED

Type COB  
Q'ty 480 chips  
CCT 2700~6500K  
CRI >80 Ra

#### Light Output


Beam Angle 120°  
Efficiency 80 Lm/W  
Lumen 800 Lm

#### Appearance

Material Anodized aluminium, PMMA  
Dimension L1000 x W29.5 x H16.4mm  
Max. Length Available 2500mm  
Diffuser Milky

#### Mounting

Recessed



Recessed



## TORINO

Torino is designed for shelf lighting applications as an alternative to T5 and T8 tube light installations.

The fixture can be easily mounted  $-45^\circ$  \ to  $+45^\circ$  \ in  $15^\circ$  \ steps.

Different configurations are available upon request.

**RGB** linear version is available.

### Specifications/data per meter

#### Electrical

Power 9W  
Input voltage 12V / 24V DC

#### LED

Type COB  
Q'ty 480 chips  
CCT 2700~6500K  
CRI >80 Ra

#### Light Output

Beam Angle  $90^\circ$   
Efficiency 100 Lm/W  
Lumen 1000 Lm (Clear)  
800 (Milky)

#### Appearance


Material Anodized aluminium, PMMA  
Dimension L1000 x  $\Phi$ 16mm  
Max. Length Available 2500mm  
Diffuser Clear / Frosted / Milky

#### Mounting

Recessed

#### Accessories

Spring steel clips (with screw / magnet)  
PC clip (with screw / magnet)

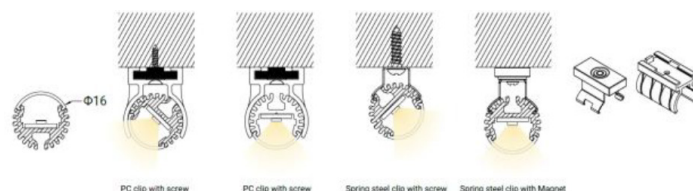

## COB LED Shelf Light



## ALU CANNES linear

A special optical diffuser makes the LED dots nearly invisible. Creating a linear effect similar to that of fluorescent tubes.

Different configurations available upon request.

### Specifications/data per meter

#### Electrical

Power 9W  
Input voltage 12V / 24V DC

#### LED

Type COB  
Q'ty 456 chips  
CCT 2700~6500K  
CRI >80 Ra

#### Light Output

Beam Angle  $110^\circ$   
Efficiency 50 Lm/W  
Lumen 500 Lm

#### Appearance


Material Anodized aluminium, PMMA  
Dimension L1000 x W10 x H10mm  
Max. Length Available 2500mm  
Diffuser Milky

#### Mounting

Surface (especially in corners)

#### Accessories

Spring steel clip (with screw/magnet) /Adhesive tape

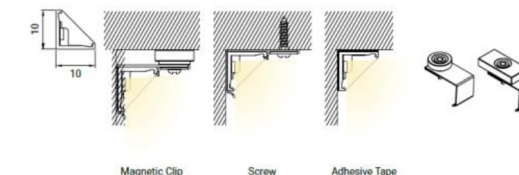



## **LUXX** Light Technology

### **LUXX Light Technology (USA) Inc.**

4425 S Kansas Ave  
St. Francis, WI 53235  
USA

info@luxx.com  
www.luxx.com

### **LUXX Light Technology (Shenzhen) Ltd.**

Building 8, 5th Floor, HuiDeBao  
Industry Park  
Bai Hua Yuan Road  
Guang Ming New District,  
Shenzhen  
Guangdong, China, 518000

Phone: +86 755 27049942

info@luxx.cn  
www.luxx.cn

### **LEDtec GmbH**

Abelbachstr. 13  
OT Steinhausen  
33142 Bueren  
Germany

Phone: +49 2951 93838-300  
Fax: +49 2951 93838-399  
info@ledtec.eu  
www.ledtec.eu

### **Sun Electronics S.R.L.**

Via Leonardo da Vinci 24/A  
20094 Corsico (Milan)  
Italy

Phone: +39 02 95327303  
Fax: +39 02 95327091  
info@sunleds.it  
www.sunleds.it



© Copyright 2021. All rights reserved by LUXX Light Technology.

Issue no. G-SH-EN-2100

All information stated is correct at the time of printing and subject to changes