

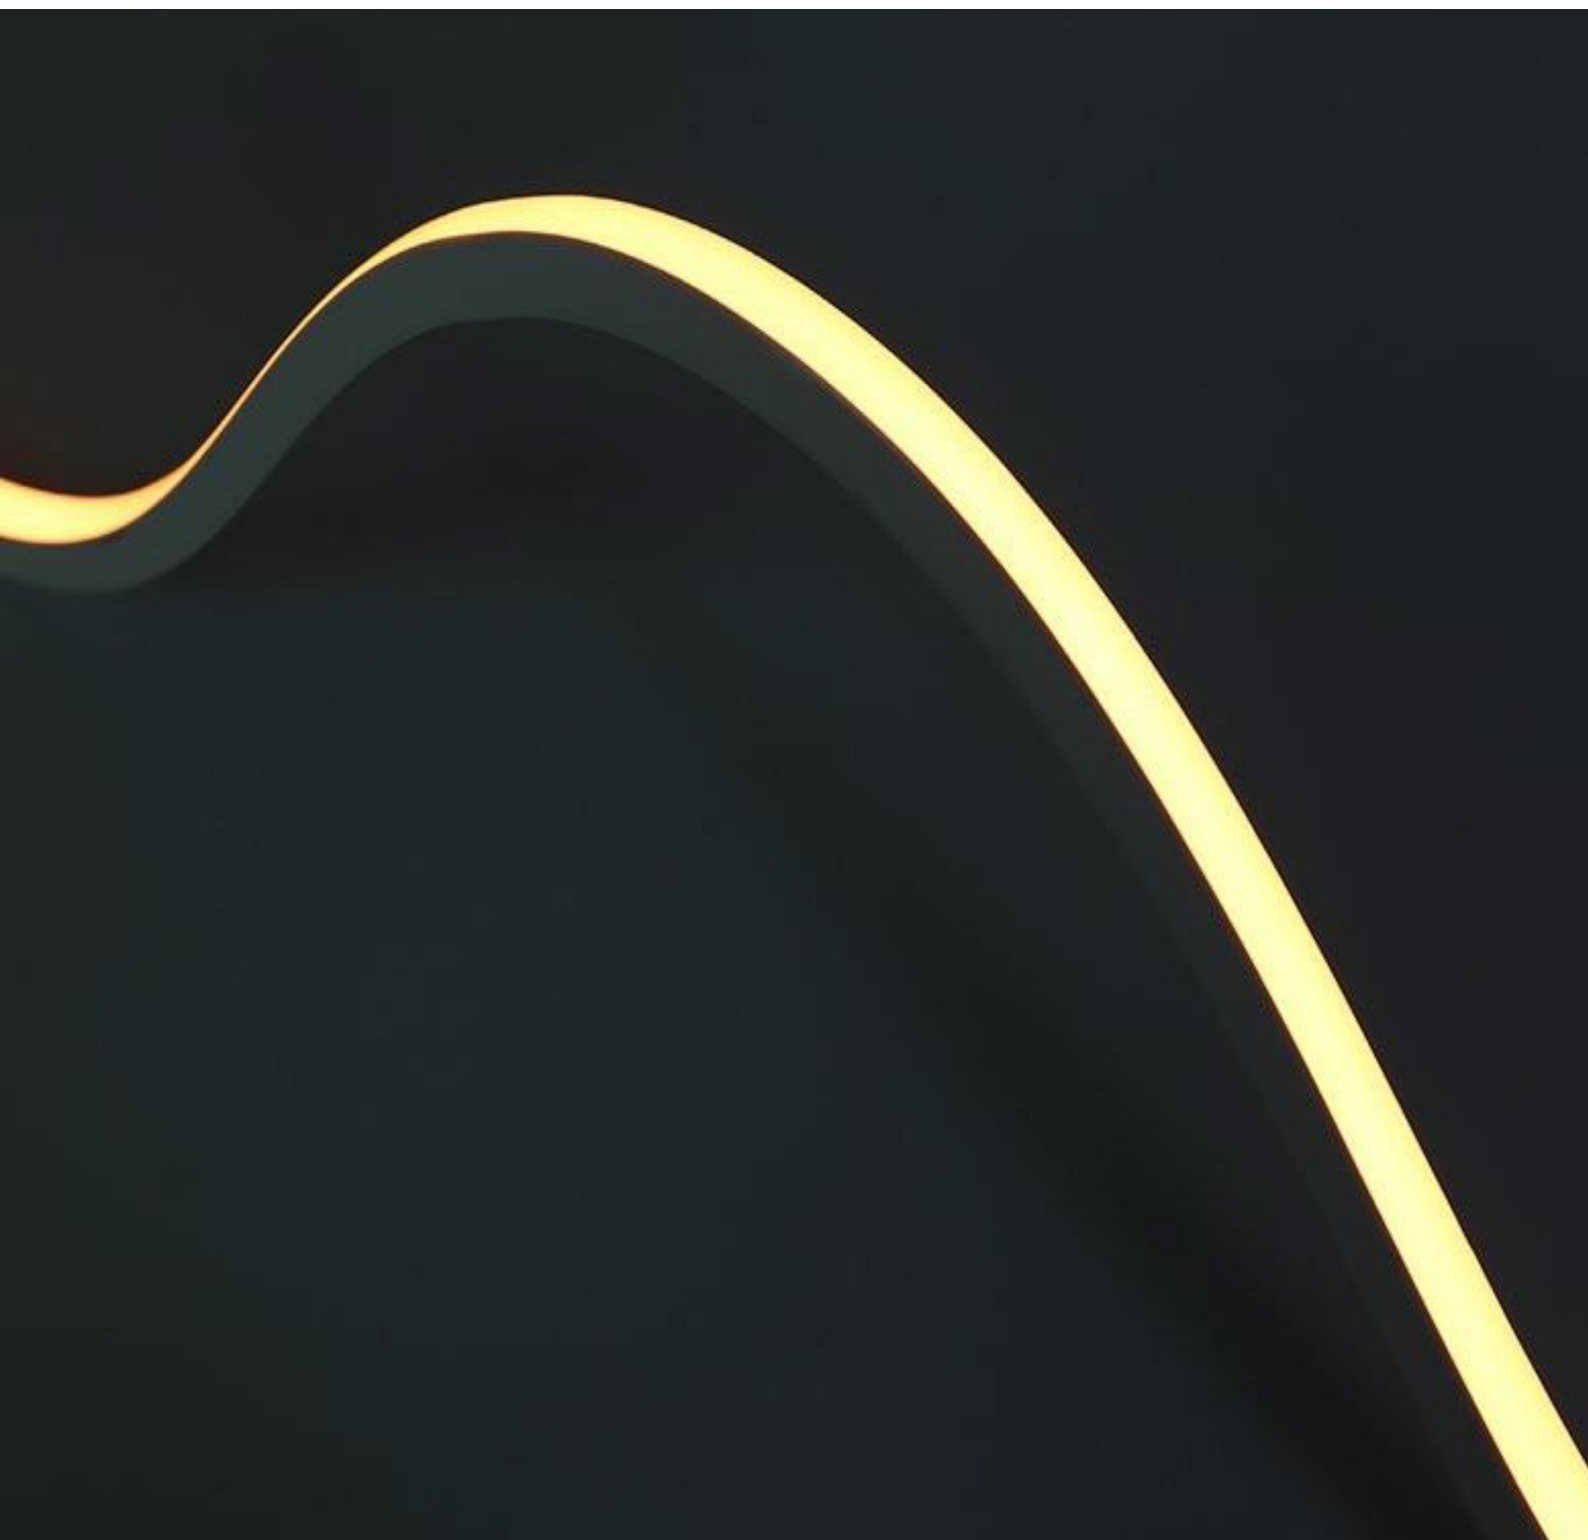
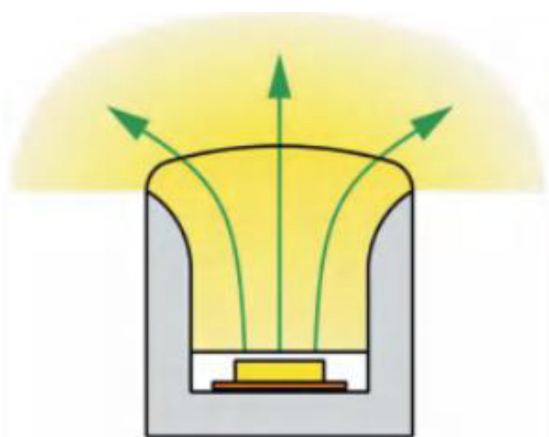


LED Neon Tube

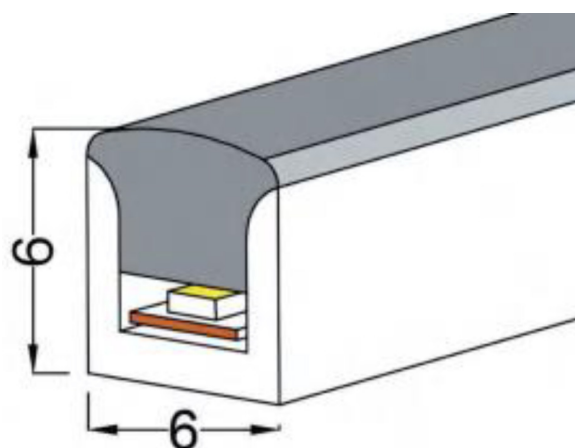

LUXX Light Technology

TOPneon 0606

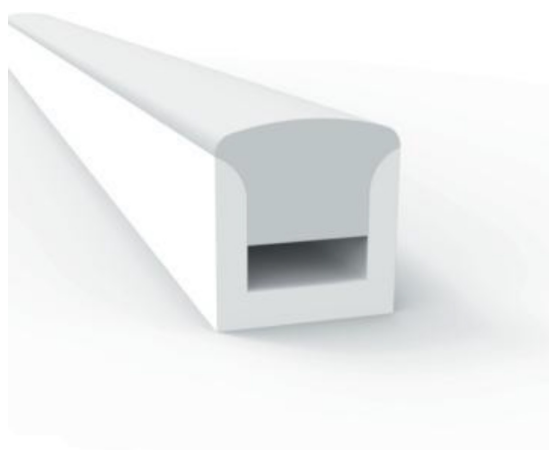

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	4mm

Light Output

Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm




IP Rating

P67



End Caps

TOPneon 0807

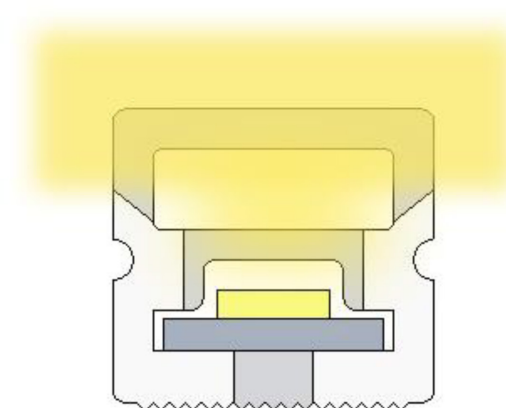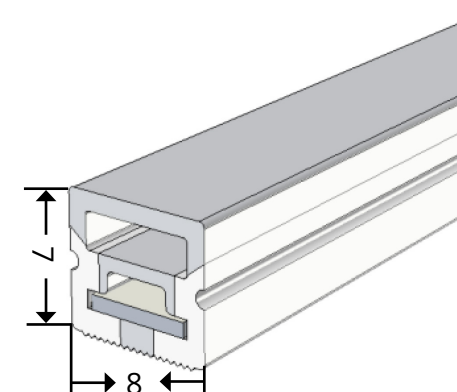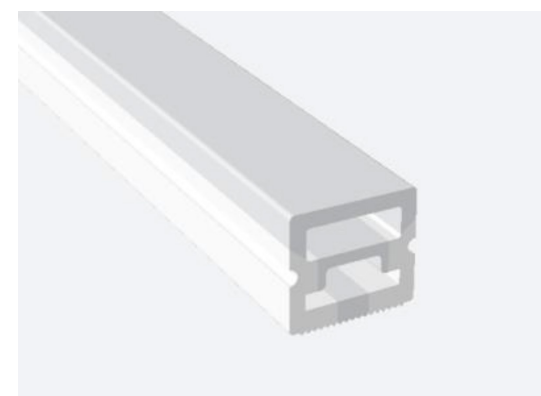

Specifications / data per meter

Electrical

Power	9.6W
Input voltage	12V / 24V DC

LED

Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm

Light Output

Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating

P67



End Caps



8mm

Mounting Clips



Mounting Profiles

TOPneon 1010




Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

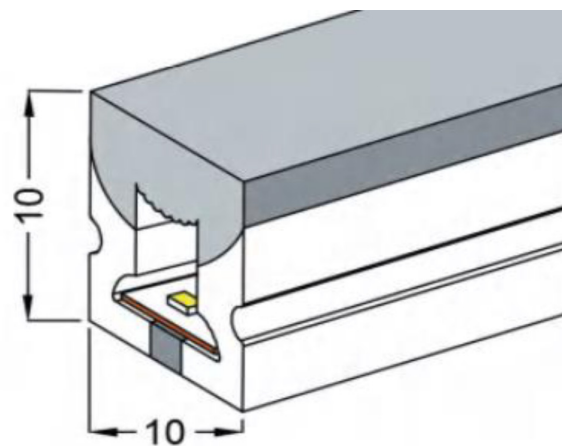

End Caps

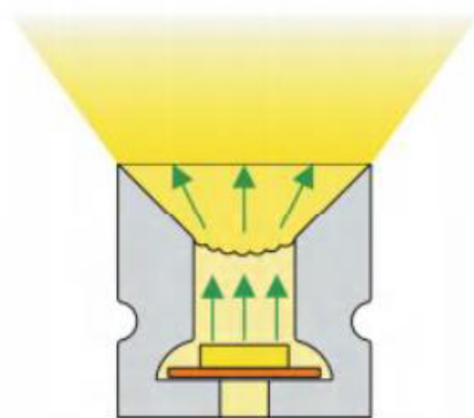

Mounting Clips



Mounting Profiles

LED Neon Tube

TOPneon 1010T




Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm

Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

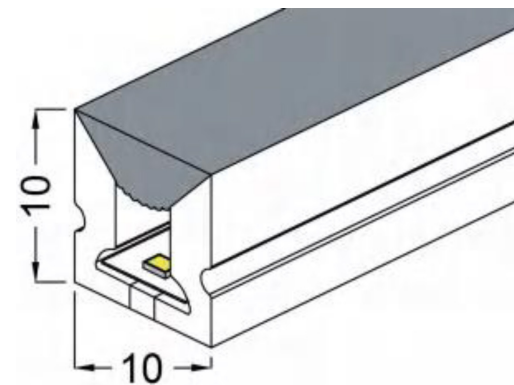

End Caps

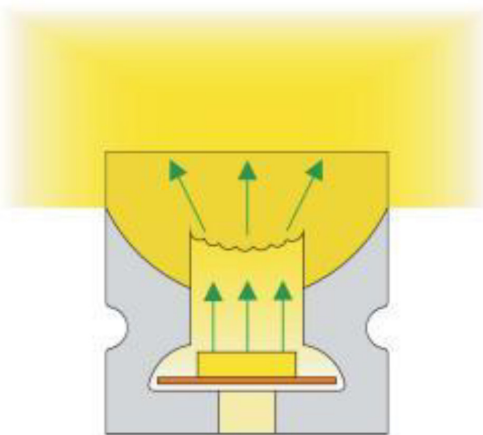

Mounting Clips



Mounting Profiles

TOPneon 1212




Specifications / data per meter


Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

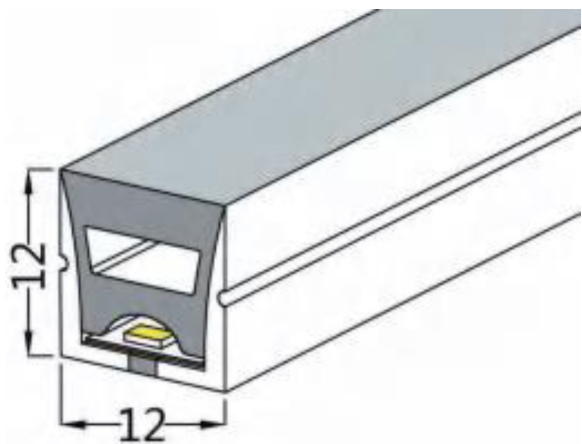

End Caps

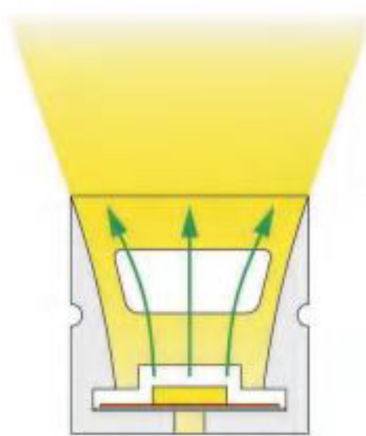


Mounting Clips



Mounting Profiles

LED Neon Tube

TOPneon 1212T

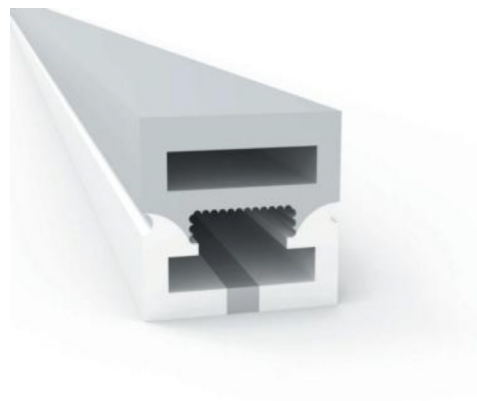


Specifications / data per meter


Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	140
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

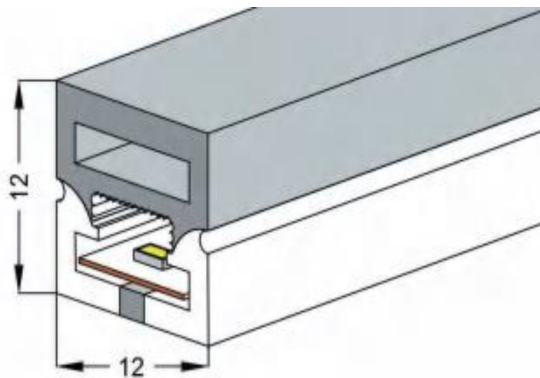

End Caps

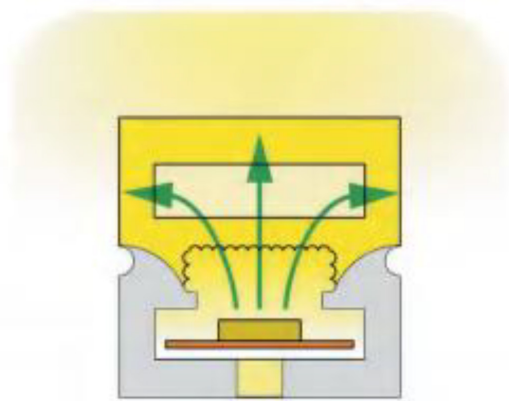

Mounting Clips



Mounting Profiles

TOPneon 2014




Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm


IP Rating	P67
------------------	-----

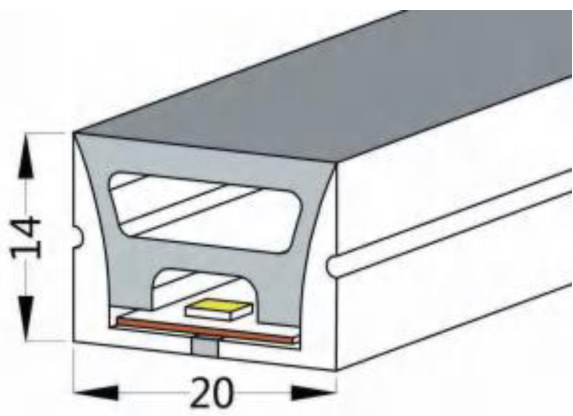

End Caps

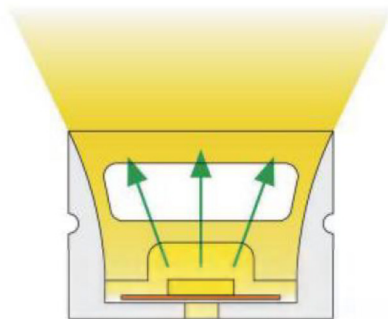


Mounting Clips



Mounting Profiles

LED Neon Tube

TOPneon 2014T

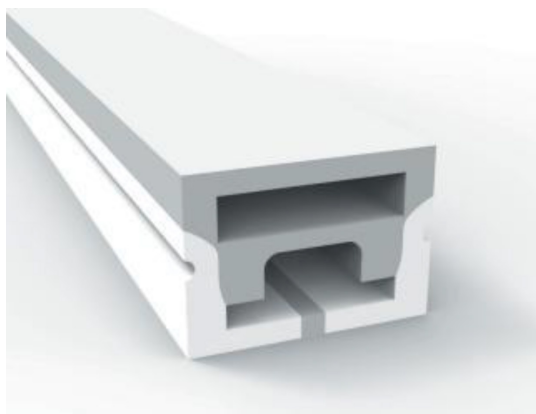


Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm


IP Rating	P67
------------------	-----

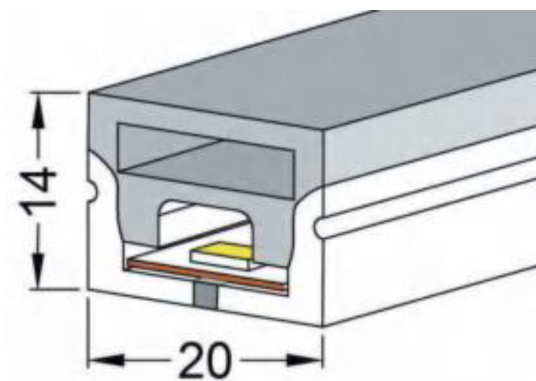

End Caps

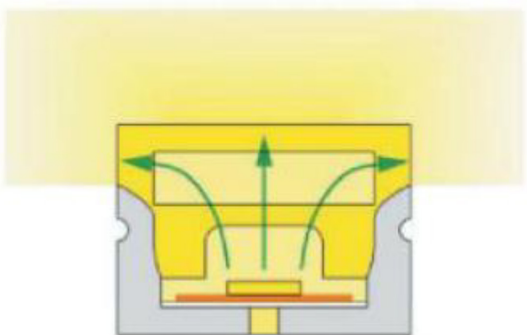

Mounting Clips



Mounting Profiles

TOPneon 1616




Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10/12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm


IP Rating	P67
------------------	-----

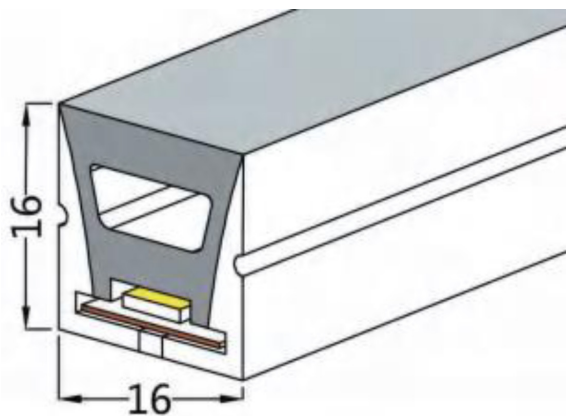

End Caps

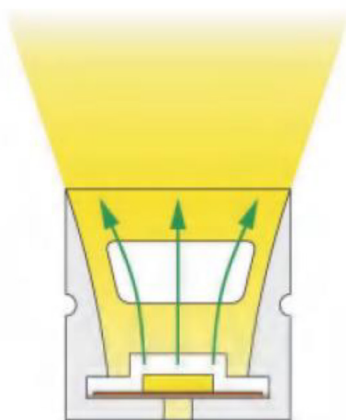


Mounting Clips



Mounting Profiles

LED Neon Tube

SIDeneon 1616

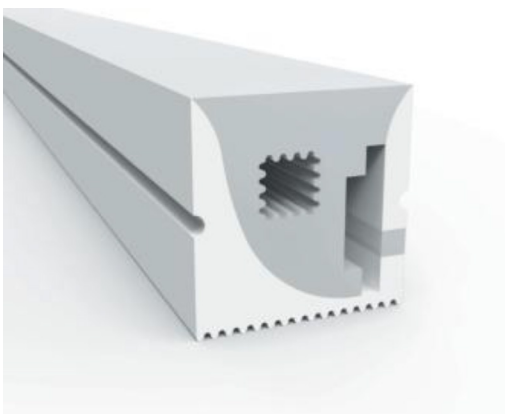


Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm


IP Rating	P67
------------------	-----

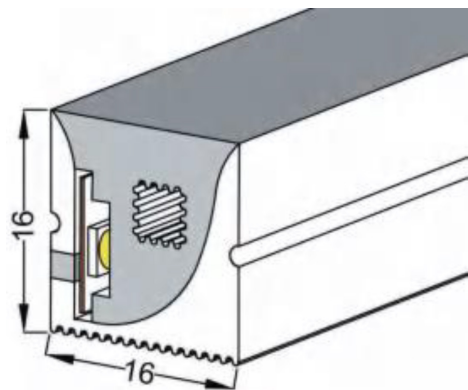

End Caps

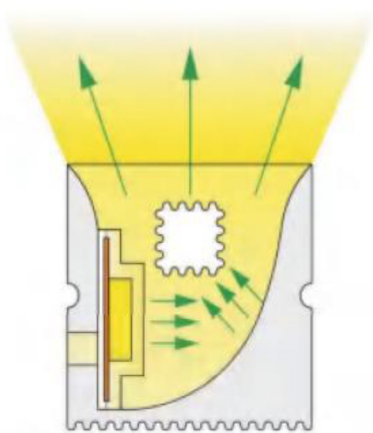

Mounting Clips



Mounting Profiles

TOPneon 2020




Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10/12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

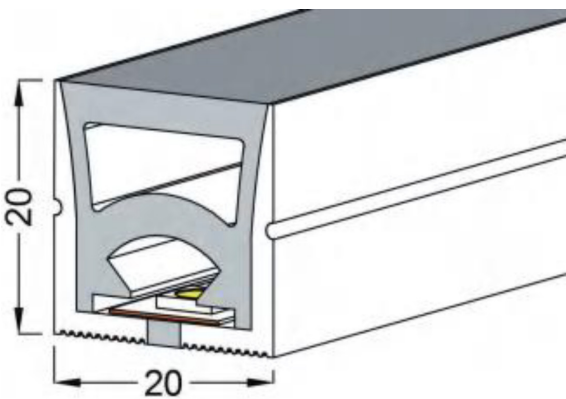

End Caps

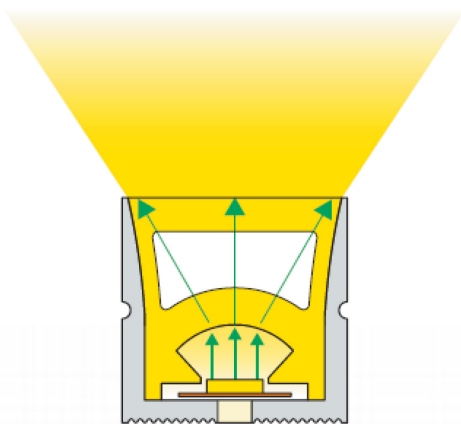

Mounting Clips



Mounting Profiles

LED Neon Tube

SIDeneon 2020




Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

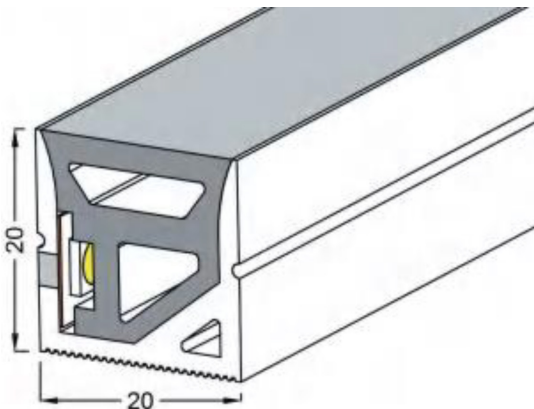

End Caps

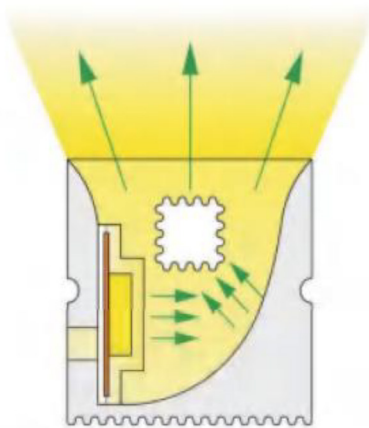

Mounting Clips



Mounting Profiles

TOPneon 3020




Specifications / data per meter



Electrical	
Power	18W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	15mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	900 Lm

IP Rating	P67
------------------	-----

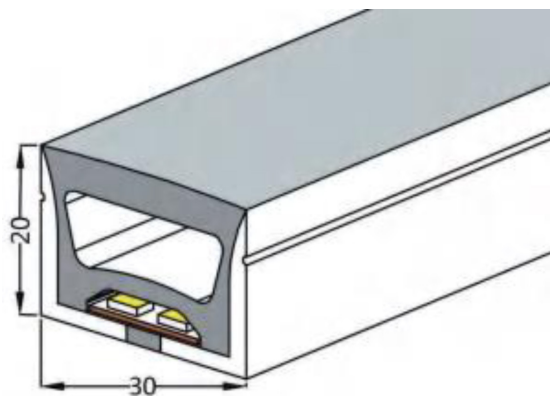

End Caps

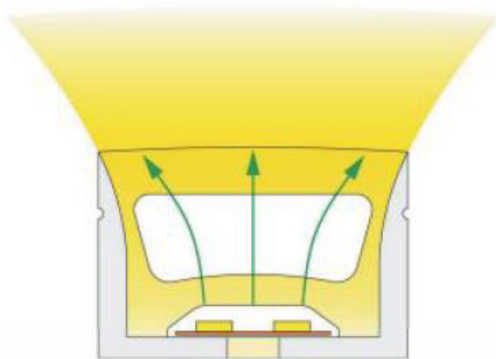

Mounting Clips



Mounting Profiles

LED Neon Tube

TOPneon 4025




Specifications / data per meter



Electrical	
Power	20W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	280
CCT	2700~6500K
CRI	>80 Ra
PCB Width	20mm (2 rows LED)

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	1000 Lm

IP Rating	P67
------------------	-----

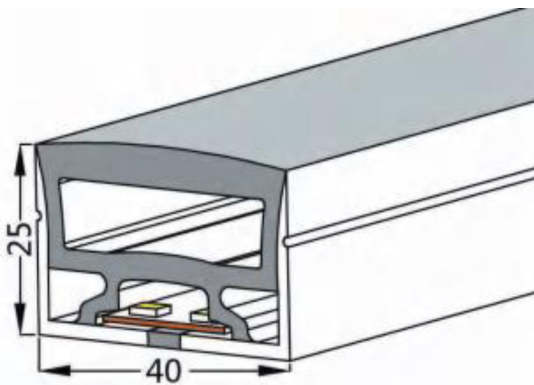

End Caps


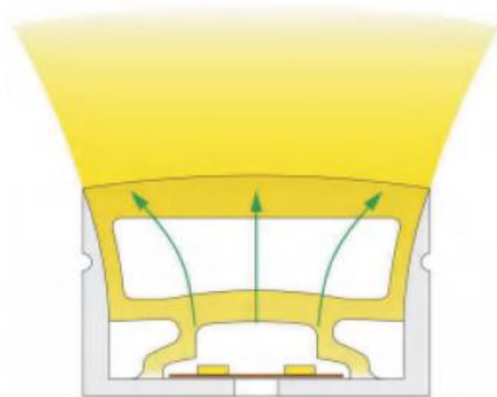


Mounting Clips



Mounting Profiles

SIDeneon 0408

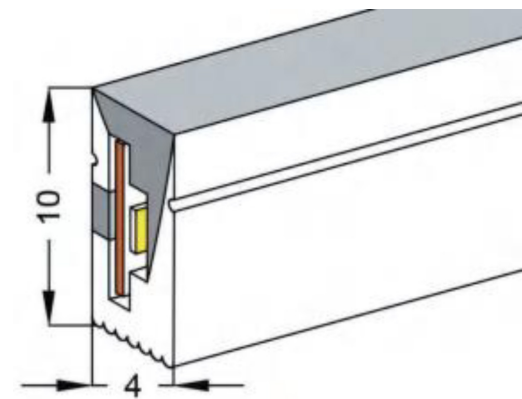
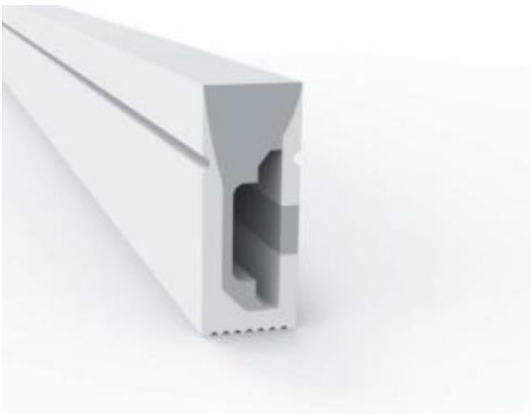


Specifications / data per meter

Electrical	
Power	8W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5mm
Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	400 Lm
IP Rating	
P67	



End Caps

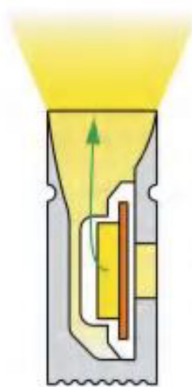


Mounting Clips



Mounting Profiles

LED Neon Tube

SIDeneon 0410


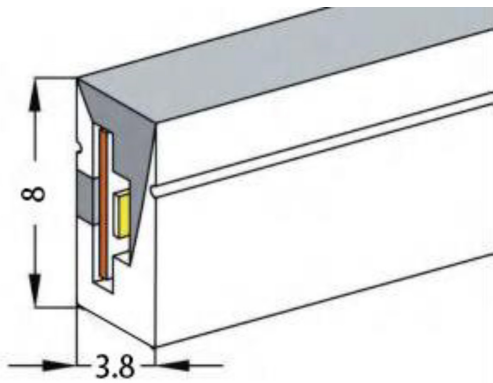


Specifications / data per meter

Electrical	
Power	8W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	280
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5/6mm
Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	1000 Lm
IP Rating	
P67	



End Caps

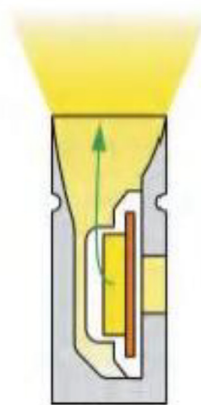

Mounting Clips



Mounting Profiles

SIDeneon 0612




Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

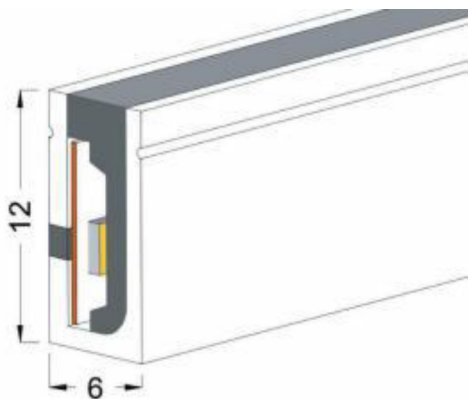

End Caps

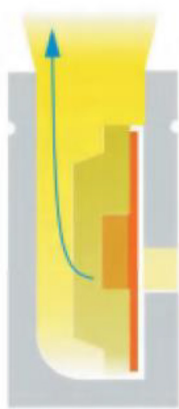


Mounting Clips



Mounting Profiles

LED Neon Tube

SIDeneon 0613T

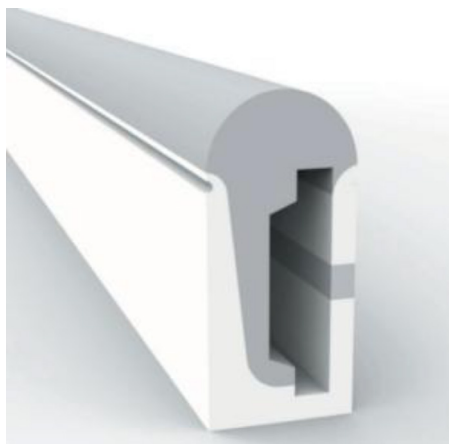


Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm

Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----

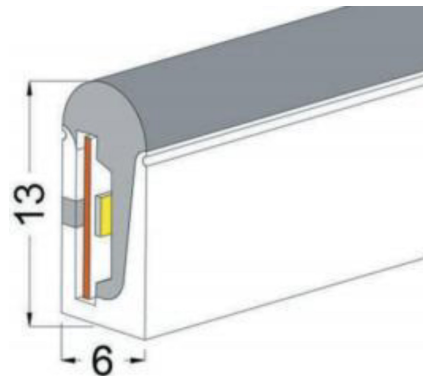

End Caps



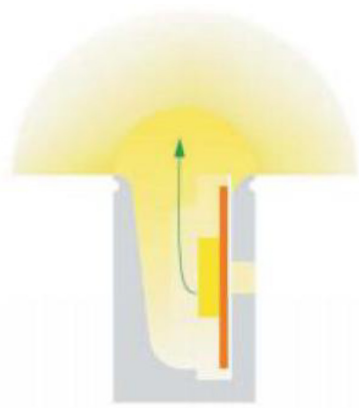


Mounting Clips



Mounting Profiles

SIDeneon 1220

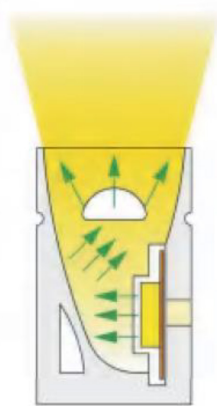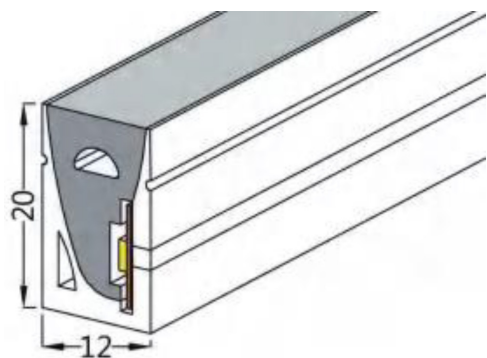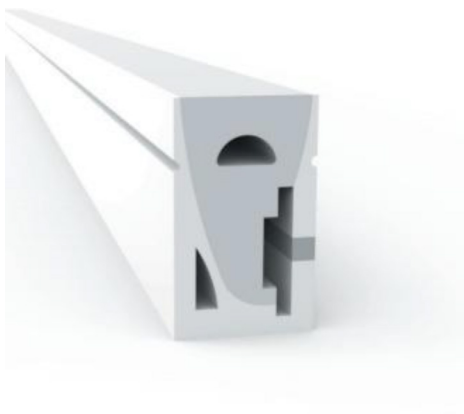


Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm
Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	



End Caps





Mounting Clips



Mounting Profiles

LED Neon Tube

SIDeneon 1220T

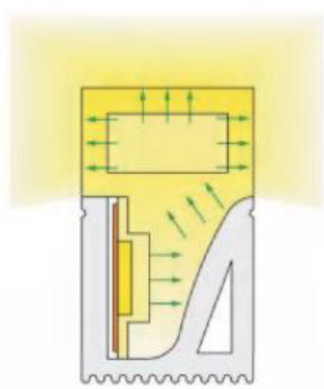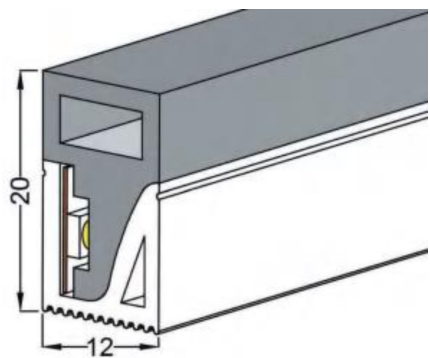


Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm
Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	



End Caps






Mounting Clips



Mounting Profiles

SIDEneon 1018T

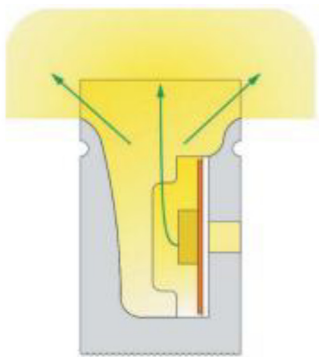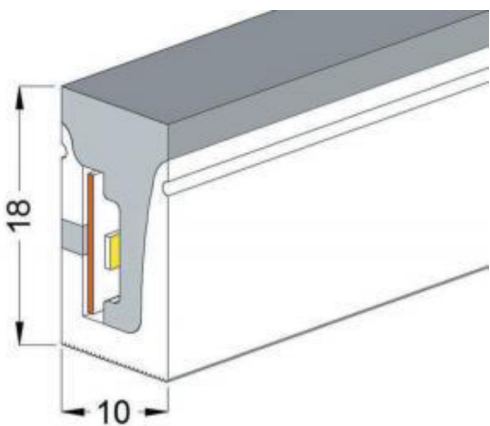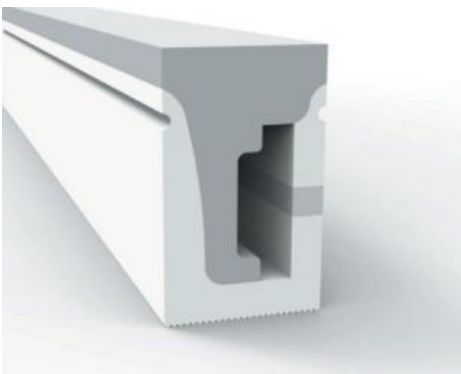

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm
Light Output	
Beam Angle	180°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	



End Caps





Mounting Clips



Mounting Profiles

LED Neon Tube

SIDEneon 3032

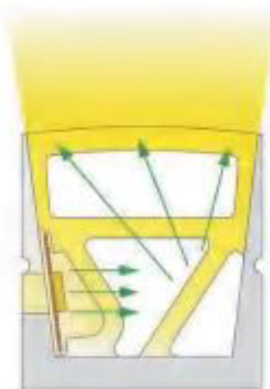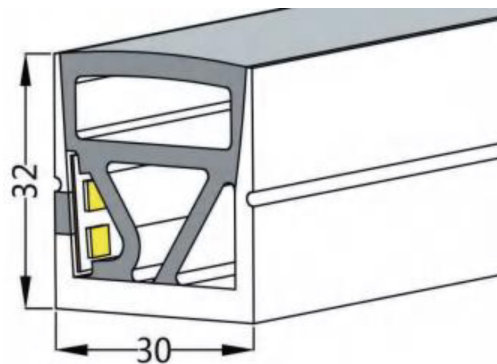


Specifications / data per meter

Electrical	
Power	18W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	15mm (2 rows LED)
Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	900 Lm
IP Rating	
P67	



End Caps






Mounting Clips



Mounting Profiles

SIDEneon 0815T

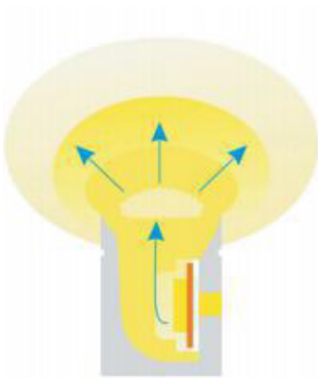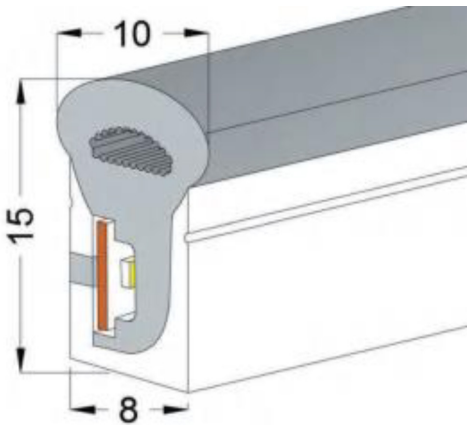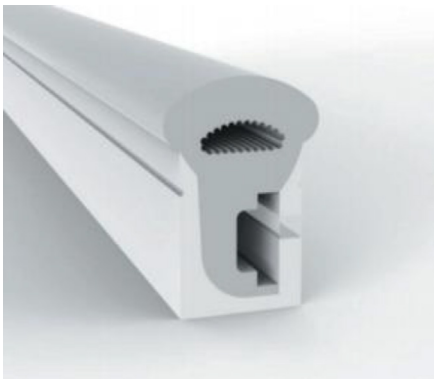


Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5mm
Light Output	
Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	



End Caps






Mounting Clips



Mounting Profiles

LED Neon Tube

SIDEneon 0817T

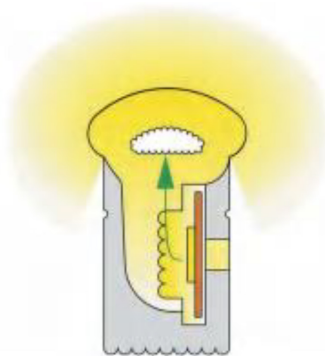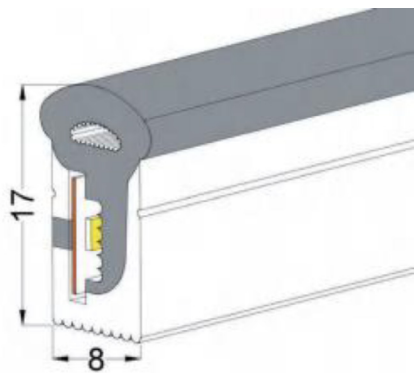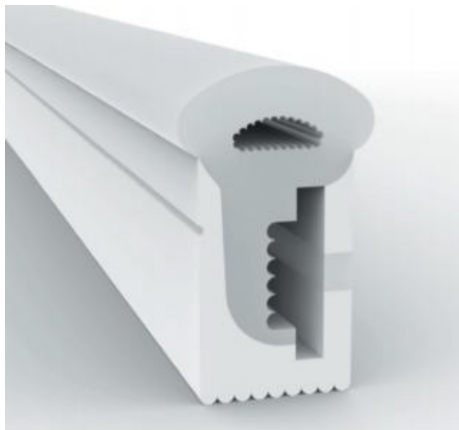


Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm
Light Output	
Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	



End Caps



Mounting Clips



Mounting Profiles

SIDEneon 1023T



Specifications / data per meter



Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm

Light Output	
Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----



End Caps

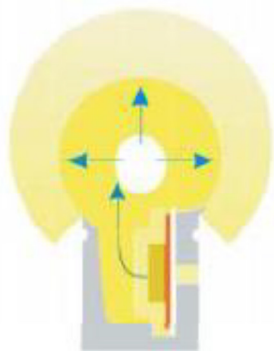

Mounting Clips



Mounting Profiles

LED Neon Tube

SIDEneon 1225T



Specifications / data per meter




Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	12mm

Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm

IP Rating	P67
------------------	-----



End Caps

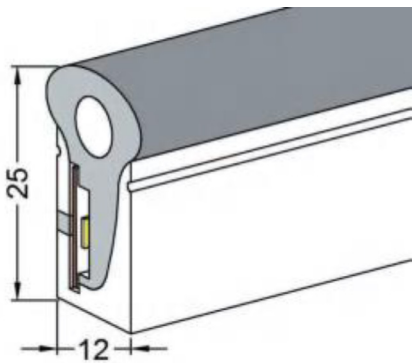


Mounting Clips




Mounting Profiles

SIDeneon 1023T

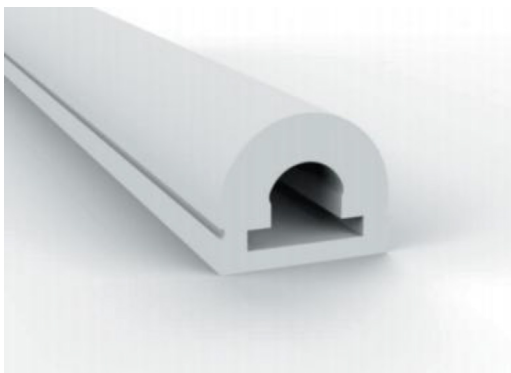

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm
Light Output	
Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	

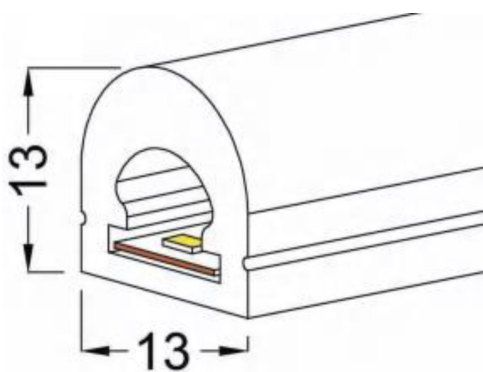

End Caps

Mounting Clips


LED Neon Tube

SIDeneon 1225T



Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm
Light Output	
Beam Angle	120°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	

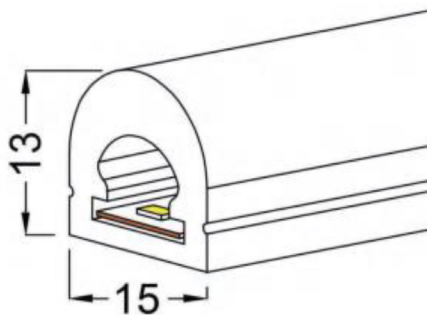

End Caps



Mounting Clips

CIRCLEneon 13



Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	5mm
Light Output	
Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	

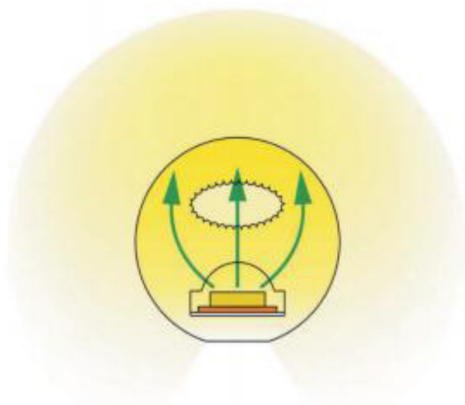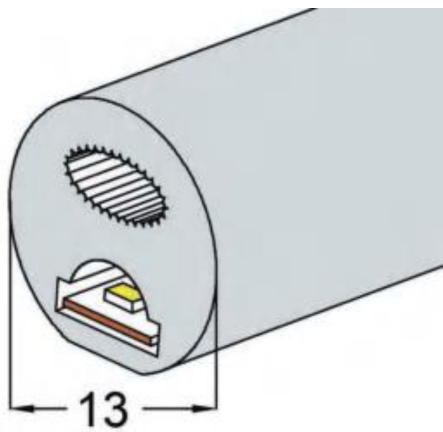


End Caps

Mounting Clips



LED Neon Tube

CIRCLEneon 20

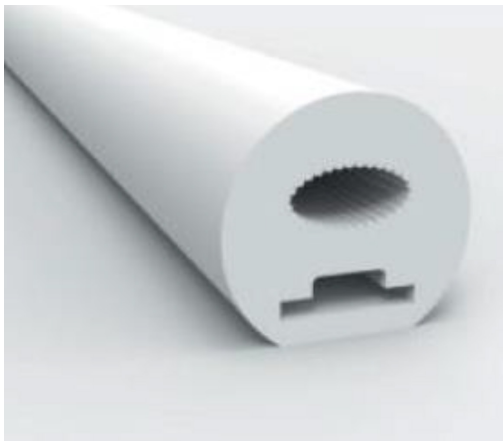

Specifications / data per meter




Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	120
CCT	2700~6500K
CRI	>80 Ra
PCB Width	10mm
Light Output	
Beam Angle	270°
Efficiency	50 Lm/W
Lumen	450 Lm
IP Rating	
P67	

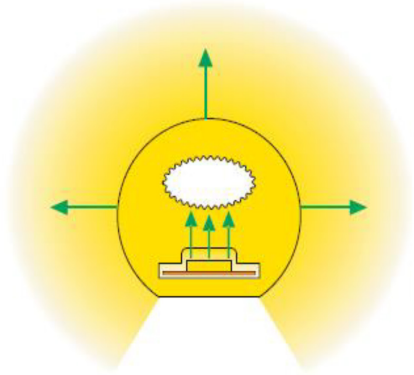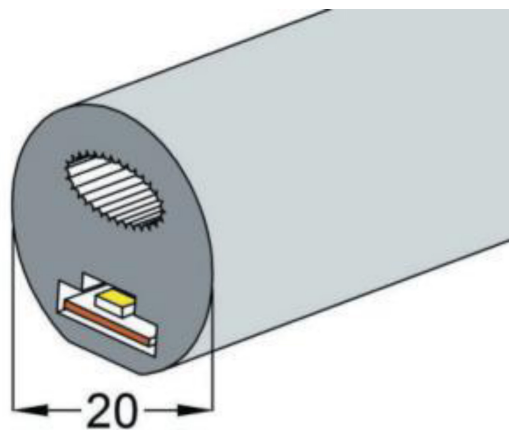

End Caps

Mounting Clips

CIRCLeneon 22

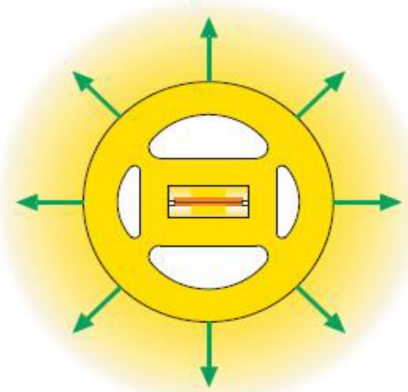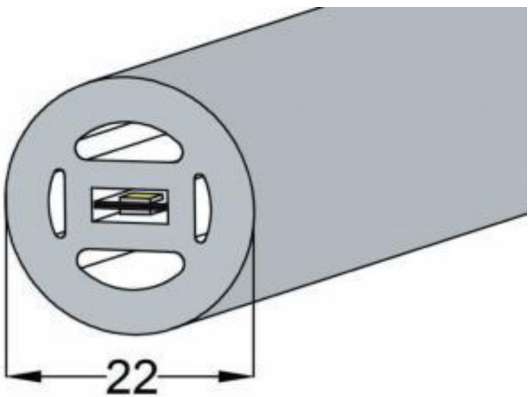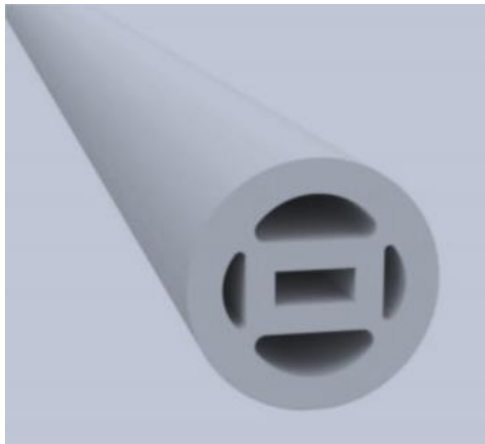

Specifications / data per meter

Electrical	
Power	18W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	6mm (double sides)
Light Output	
Beam Angle	360°
Efficiency	50 Lm/W
Lumen	900 Lm
IP Rating	
P67	






End Caps



Mounting Clips

LED Neon Tube

CIRCLeneon 22S

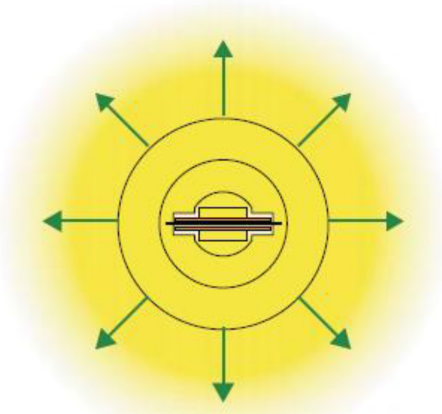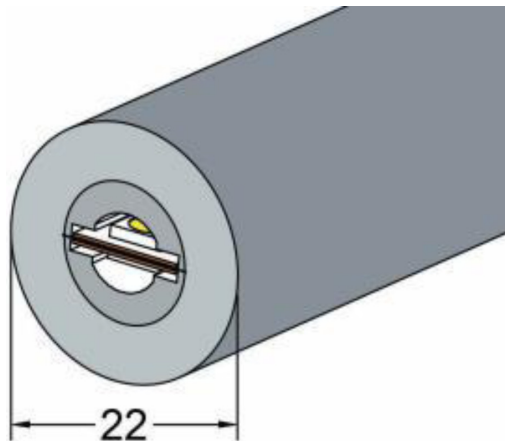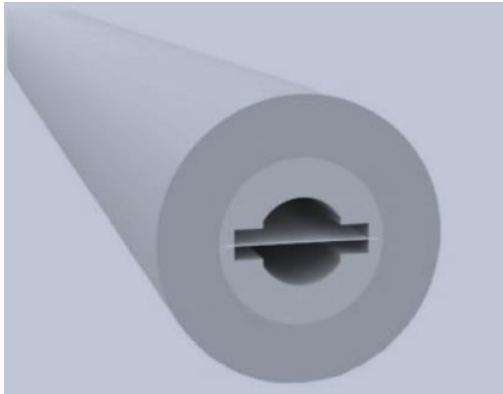

Specifications / data per meter

Electrical	
Power	9.6W
Input voltage	12V / 24V DC
LED	
Type	2835
Q'ty	240
CCT	2700~6500K
CRI	>80 Ra
PCB Width	8mm (double sides)
Light Output	
Beam Angle	360°
Efficiency	50 Lm/W
Lumen	900 Lm
IP Rating	
P67	



End Caps



Mounting Clips

LUXX Light Technology

LUXX Light Technology (USA) Inc.

4425 S Kansas Ave
St. Francis, WI 53235
USA

info@luxx.com
www.luxx.com

LUXX Light Technology (Shenzhen) Ltd.

Building 8, 5th Floor, HuiDeBao
Industry Park
Bai Hua Yuan Road
Guang Ming New District,
Shenzhen
Guangdong, China, 518000

Phone: +86 755 27049942

info@luxx.cn
www.luxx.cn

LEDtec GmbH

Abelbachstr. 13
OT Steinhausen
33142 Bueren
Germany

Phone: +49 2951 93838-300
Fax: +49 2951 93838-399
info@ledtec.eu
www.ledtec.eu

Sun Electronics S.R.L.

Via Leonardo da Vinci 24/A
20094 Corsico (Milan)
Italy

Phone: +39 02 95327303
Fax: +39 02 95327091
info@sunleds.it
www.sunleds.it



© Copyright 2021. All rights reserved by LUXX Light Technology.

Issue no. G-SH-EN-2100

All information stated is correct at the time of printing and subject to changes